



Braid

Made of **polyester**, as per regulations for anchors.

| Code | Ø mm | Length m |
|-----------|------|----------|
| 01.106.00 | 8 | 30 |
| 01.106.01 | 10 | 30 |



Line with chain

Orange levilene line **as per regulation for anchors**.
Fitted with a 2-metre galvanized chain and a shackle for connection to the anchor.

| Code | Ø mm | Length m |
|-----------|------|----------|
| 01.105.00 | 8 | 30 |



Line for chain and rope windlass.

Made with three-strand white rope and **stainless steel chain link**, the end part can be connected to the windlass chain.

| Code | Ø mm | Length m | Gypsy Ø mm | Chain link Ø mm | For windlasses |
|-----------|------|----------|------------|-----------------|--|
| 02.636.01 | 10 | 35 | 6 | 6 | Manual mooring, Lofrans: Project x1; Italwinch 02.407.01 |
| 02.636.02 | 12 | 35 | 6 | 6 | Lewmar: Pro-series 1000, V-700, V1, V2 Lofrans: Project x1, Dorado 500W, Marlin; Lewmar CPX0; Italwinch Ray; Italwinch RayLux |
| 02.834.00 | 14 | 35 | 8-10 | 8 | Lewmar: Pro-series 1000, V1, V2, V3, V4 Lofrans: Project x1-x2-x3, Project 1000-1500, Dorado 700W, Clipper 700-1000; Italwinch Thunder, Italwinch ThunderLux |
| 02.636.05 | 16 | 40 | 10 | 10 | Lewmar: Pro-series 1000, V3, V4,V5 Lofrans: Project x2-x3, Project 1000-1500, Clipper 1000; Italwinch Thunder Lux Ø 16 |




Anchor line made of polyester braid with lead core in the first 10 metres

Terminal with thimble and hand-made splicing.
It comes in an elegant nylon bag with blue string.

| Code | Ø mm | Length m | Lead core length m | Lead weight kg | Total weight kg |
|-----------|------|----------|--------------------|----------------|-----------------|
| 06.446.10 | 10 | 30 | 10 | 3 | 5 |
| 06.446.12 | 12 | 30 | 10 | 4 | 7.5 |

Douglas Marine

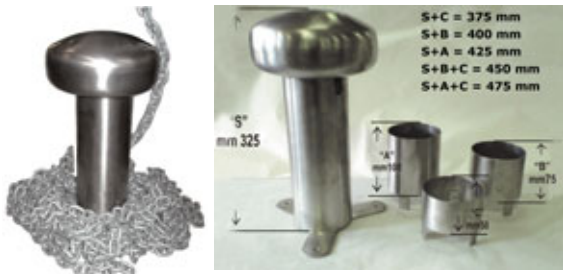

Chain Boy chain stowing system

PATENT

It allows tidy chain stowage on all anchor chain lockers.
Minimum locker height when hauling in the anchor: 80 mm for 6/8-mm chain, 100 mm for 10/12-mm chain.

| Code | Base Ø mm | Head Ø mm | Adjustable height |
|-----------|-----------|-----------|--|
| 01.550.00 | 150 | 170 | 325 to 475 mm by means of the inserts included |



Deluxe Chain Stopper device made of pressed sheet + precision-cast parts.

AISI 316

The chain stopper device prevents the anchor rode unwanted release while the boat is in use. It also prevents shock/abnormal loading of the windlass while the boat is at anchor.
The CHAIN STOPPER can be disengaged with a simple movement.

| Code | For chain Ø mm | Base mm | Protrusion mm |
|-----------|----------------|---------|---------------|
| 01.119.34 | 6/8 | 60x50 | 47 |
| 01.119.35 | 10/12 | 80x70 | 63 |