



Signalling buoy

This buoy contains a 20-metre length of polyester webbing on a self-winding roll. The webbing is fastened to the anchor by means of a shackle and is released gradually according to the depth of the anchorage. Once anchorage done, the buoy floats directly above the anchor. This prevents moorings becoming entangled in the line. If the anchor gets stuck, the webbing can be used to recover the anchor (breaking load 290 kg).

Code	Ø mm	Height mm
01.210.00	310	370

Grippy: compact and lightweight signalling buoy with self-winding HMPE line and night light

The first signalling buoy with 2 fully watertight chambers housing electronic and mechanical parts, which prevents possible malfunctions due to the marine environment. Extremely lightweight and compact, it has a 200-mm diameter and weighs as little as 1.2 kg. The end of the GRIPPY line has to be connected to the anchor crown, and it will automatically unwind when deploying the anchor. The line self-adjustment let GRIPPY float on the anchor perpendicular consequently signalling its position. At night, GRIPPY automatically activates its solar-powered night lights (LIGHT version). In case of tangled anchor, it can be handled by retrieving the buoy rope, whose breaking load exceeds 500 kg. When retrieving the anchor, GRIPPY will automatically wind its line and will position under the boat bow. It comes with a convenient stanchion support (LIGHT version) and a pull-out visual signaller.



Code	Model	Anchor buoy length m	Anchor buoy breaking load kg	Description	Handrail support	Ø mm	kg
01.211.01	Grippy Basic	15	500	With visual signaller	No	200	1.2
01.211.02	Grippy Light	25	500	With visual signaller + night automatic lights	Yes	200	1.2
01.211.03*	Grippy Heavy	20	1200	With visual signaller + night automatic lights	Yes	200	1.4

* Stainless steel protection for anchor buoy included.
 01.211.09 **New** 10-m extension (1200-kg breaking load).





► Stainless steel rollers

Bow roller for dolphin strikers

Made of **stainless steel** for mounting **under** the dolphin striker.

Code	Sheave material	Recess-fit width mm	Spare sheave
01.118.81	Hard rubber	45	01.218.82
01.118.87	Nylon	51	01.519.02
01.118.89	Hard rubber	89	01.219.94
01.119.92	Hard rubber	85	01.219.94

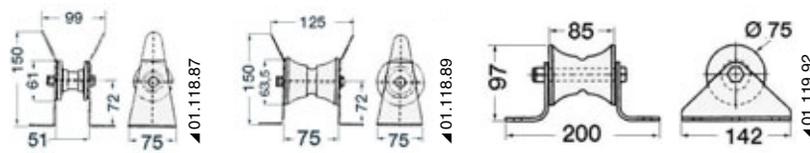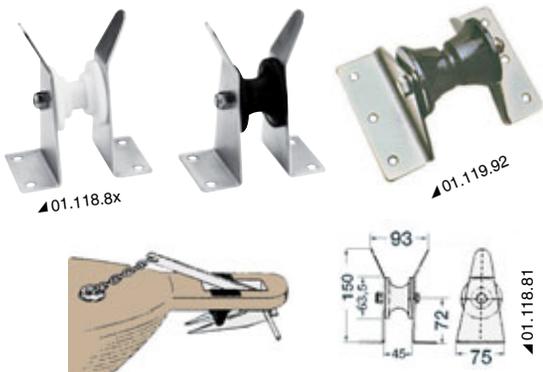

Bow roller



Made of **satin-finish stainless steel** with **nylon** sheave.

Code	Length mm	Width mm	Height mm	Spare sheave
01.118.82	155	51	72	01.218.82

Bow fairlead



This model by Osculati is made of **AISI 316 stainless steel**, **nylon** sheave suitable for ropes up to 14 mm and for chains up to 6/8 mm. Very sturdy and practical.

Code	Length mm	Base mm
01.349.00	130	90x90