

► Manual winches and accessories

Boat haulage winch

Chromed-zinc steel body, highly-resistant hardened steel pinions, self-lubricating bushing, reinforced handles, stainless steel springs, cased gearing. Black epoxy powder coated

Code	Max pull kg	Ratio	Max. capacity m	Speed	Gear	mm
02.800.00	350	3.2:1	33 (Ø 3 mm) / 14 (Ø 5 mm)	Single	Forward and idle	95x94
02.100.00	450	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward and idle	140x88
02.120.00	540	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward, idle, reverse	140x88
02.140.00	630	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward, idle, reverse	140x88
02.150.00 New	727	4:1	24 (Ø 5 mm) / 13 (Ø 8 mm)	Single	Forward, idle, reverse	138x89
02.200.00	900	4:1 and 10:1	30 (Ø 5 mm) / 15 (Ø 8 mm)	Double	Forward, idle, reverse	175x125
02.250.00*	1125	5:1 and 12:1	30 (Ø 5 mm) / 15 (Ø 8 mm)	Double	Forward, idle, reverse	175x125

 The max pull of the winches refers to use with one of cable. The max. pull load of the winches refers to the use with only one coil of cable.

* Fitted with quick manual brake.




Boat haulage winch with clutch

Chromed-zinc steel body, highly-resistant hardened steel pinions, self-lubricating bushings, reinforced handles, stainless steel springs, faired gearing. BRAKE WINCH version with **automatic break and clutch**; without the pawl, the drum stays still and releases the handle.

Code	Max pull kg	Ratio	Max capacity m	mm
02.252.00	630	4.1:1	22 (5-mm Ø)	165x92


 The max pull of manual winches refers to use with one wrap of cable.

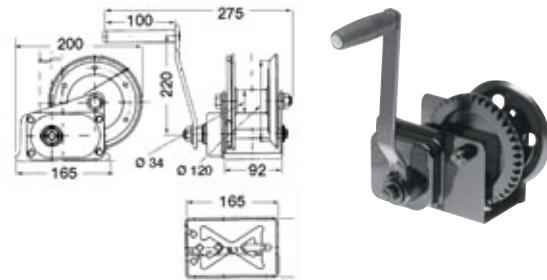

Boat haulage winch with technopolymer external case

Epoxy-powder coated steel frame, hardened steel pinions, self-lubricating bushings, reinforced handles, steel springs.

Code	Max pull kg	Ratio	Capacity	Speed	Gear
02.100.01	450	4:1	24 m (Ø 5 mm) / 13 m (Ø 8 mm)	Single	Forward, neutral
02.120.01	540	4:1	24 m (Ø 5 mm) / 13 m (Ø 8 mm)	Single	Forward, neutral, reverse
02.140.01	630	4:1	24 m (Ø 5 mm) / 13 m (Ø 8 mm)	Single	Forward, neutral, reverse

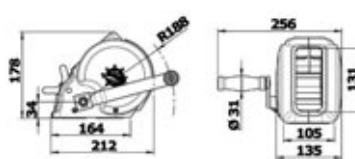

ROCK winch with automatic lock

The self-locking device (working with a minimum load of 25 kg) allows a safe use of the winch.

Epoxy-powder coated galvanized chromed steel body.

Code	Max pull kg	Ratio	Accessories INCLUDED	Cable capacity
02.130.01*	545	4.25:1	6 m of tape + snap hook	17 m of 5-mm Ø steel cable
02.130.02*	680	5.08:1	6 m of tape + snap hook	17 m of 5-mm Ø steel cable
02.130.03	900	8.78:1	10 m of 6-mm steel cable + snap hook	20 m of 6-mm Ø steel cable
02.130.04	1135	11:1	10 m of 6-mm steel cable + snap hook	20 m of 6-mm Ø steel cable

 * With safety cover on the gears

ROCK®

