

LABCRAFT Microlux LED hi-tech ceiling light



- IP67
- LED

It consists of Superlux LEDs embedded in a IP67 watertight extraresistant structure.
With a 90° light opening, it is ideal for applications in damp or exposed environments (bilges, cockpits, flybridge, etc.)

Code	Type	Frame colour	V	W	Lumen	K	LED beam angle	LED N.	mm
13.199.00	MICROLUX	Black/Grey	12/24	2.7	354	5700 - 6500	180°	2	128x100x15
13.199.02	SUPERLUX	White/Silver	12/24	6	624	5700 - 6500	180°	2	128x100x15




ATTWOOD LED courtesy light



- IP67
- LED

Installation **without additional components**. Polished stainless steel finishing collar.
Totally waterproof, suitable for indoor and outdoor use.

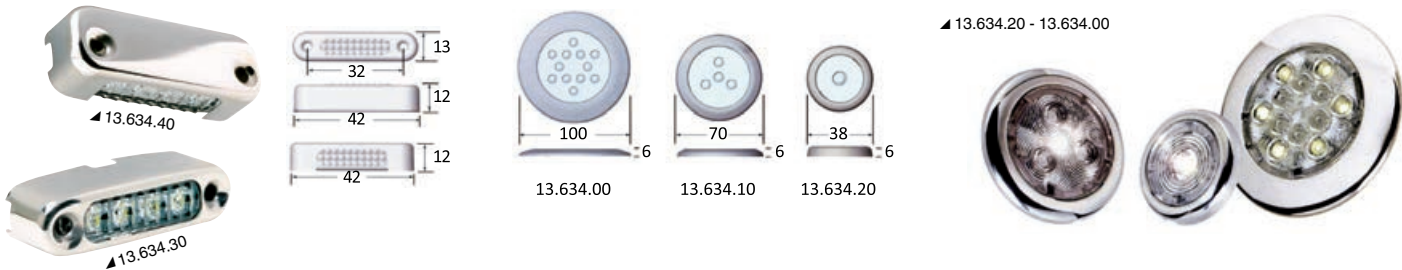

Light Type		Versions	V	W	No of LEDs	Light beam	Ø mm	Overhang mm	mm
White	Blue								
13.634.00	-	Round	12	3	6	-	100	6	-
13.634.20	-	Round	12	1.1	1	-	38	6	-
13.634.30	13.634.31	Oval, also suitable for gangplanks and ladders	12	1	4	horizontal	-	12	42
13.634.40	-	Oval, also suitable for gangplanks and ladders	12	1	4	vertical	-	12	42

Aurora pop-out LED table light

13.448.00 - A Flush Lamp, that is concealed when retracted

