

DHR high-beam light adjustable from inside

Made of **chromed brass and stainless steel**, watertight, adjustable nylon ball joint, frictioning, very small and convenient control handle; supplied with watertight bulbs "GE."

Code	V	Capacity m	Ø mm	Spare bulb
13.242.12	12	800	145	13.116.00
13.242.13*	12/24	100/400	145	13.241.03
13.242.24	24	800	145	14.249.04
13.342.12	12	1200	185	14.249.05
13.342.24	24	1200	185	14.249.06

* With 12/24 V LED bulb double beam SPOT + FLOOD W 24+24

Electric spotlights

OSCULATI

New

Electric exterior LED spotlight Type One

LED


UV-resistant carcass in Luran, completely waterproof. Horizontal rotation 352°, vertical 50°. Double filament LED bulb (SPOT+FLOOD) 23 W + 23 W. 3 types of optional control. Protection against electronic interference. The headlights can be connected to 2 types of optional controls that can be independent or combined to create the desired configuration:

- 1) Dashboard control with joystick. Cable included, 4.5 m. It's possible to install another joystick using the 2-port cable 13.227.51.
- 2) Classic remote control provided with bracket for dashboard mounting. Range up to 40 m away from the headlight.
- 3) The remote control pairs with the headlight on first use (following instructions) and doesn't interfere with the electronic equipment of nearby boats; multiple remote controls can be paired with the headlight.
- 4) The headlight is more responsive to command and precise to impulse compared to the previous version.



Code	V	CD candles*	W	Lumen	Range 0.25 Lux*	OPTIONAL joystick control 4.5-m cable	OPTIONAL wireless radio remote control	OPTIONAL additional joystick 4.5-m cable	OPTIONAL 10-m extension cable for 13.227.49	LED Spare bulb
13.227.01	12	133.200	23+23	2400	730	13.227.49	13.227.50	13.227.51	13.225.00	13.225.37

* To be measured at the centre of the light beam.

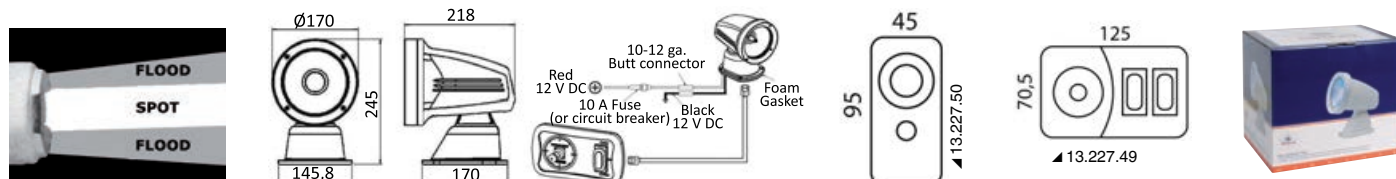

OSCULATI

Classic electric exterior spotlight

Body: diecast aluminium coated in white high-resistance anti-corrosion resins. Totally watertight. 2-speed 355° horizontal rotation. 50° vertical rotation.

Version A: 100W+90W double filament halogen bulb (spot + flood).

Version B: ultra-powerful HID Xenon gas discharge bulb (35W HID).

- It can be connected to 3 optional controls (independent or combined) for the desired configuration:
- 1) Joystick-operated bridge control (to be connected to the lighthouse via a phone cable), 4.5-m cable included, 10-m cable to be purchased separately.
 - 2) Wireless bridge control (power the panel and it will interface wirelessly to the lighthouse).
 - 3) Traditional radio remote control with bracket for mounting on the bridge.



Code	Version	V	CD candles*	W	Range 0.25 Lux*	Lumen	OPTIONAL joystick control	OPTIONAL bridge wireless control	OPTIONAL wireless remote control	OPTIONAL 10-m extension cable for 13.225.39	Spare bulb
13.225.12	A	12	180.000	100+90	849	2500	13.225.39	13.225.41	13.225.40	13.225.31	13.225.35
13.225.24	A	24	180.000	100+90	849	2500	13.225.39	13.225.42	13.225.40	13.225.31	13.225.36
13.224.12	B	12	315.000	35	1122	3200	13.226.39	13.226.41	13.226.40	13.225.31	13.224.32
13.224.24	B	24	315.000	35	1122	3200	13.226.39	13.226.42	13.226.40	13.225.31	13.224.32

* To be measured at the centre of the light beam.

