

Mega-Xenon electrically operated light with XENON light source

XENON

This technology is a spin-off from luxury cars to the nautical sector.
The resulting spotlight has an incredibly white and powerful light beam.
UV-resistant white ABS body. 55-W xenon light source.
Fitted with multifunction watertight control panel.



▲ 13.237.12/24

Code	V	Rotation	Traverse	Height mm	Depth mm	Ø mm	Second station panel	Spare panel for basis	Spare optical system	4-m extension cable
13.237.01	12	380°	70°	320	240	210	13.237.30	13.237.12	13.237.09	13.230.05
13.237.02	24	380°	70°	320	240	210	13.237.31	13.237.24	13.237.10	13.230.05

Spot light for cockpits, decks and cross-tree

Deck light for mast

Fitted with flexible flaps adaptable to any type of mast. Halogen bulb included.

Code	Body	V	W	Spare bulb		←→ mm
				12 V	24 V	
13.343.87	White nylon	12	20	14.453.01	14.100.24	130x72x65




Utility navigation light and deck light for hulls up to 12 m

225° navigational light (product number 11.415.03) complying with **IMCO and RINA** standards.
Equipped with special 35 W 12 V halogen dichroic bulb with front glass (spare bulb 13.258.57).
Made of black polycarbonate, 100% watertight, fitted with side flexible locking wings suitable for masts of **any size**.

Equipped with **RINA type-approved** light 11.415.03 (spare bulb 14.300.00).

Code	Version	Body	V	W	W equivalent	Spare bulb	←→ mm
13.243.86	Halogen dichroic spot light	Black polycarbonate	12	35	-	14.258.57 12 V	175x135
13.243.87	HD LED spot light	Black polycarbonate	12	4	48	14.258.56 LED	175x135

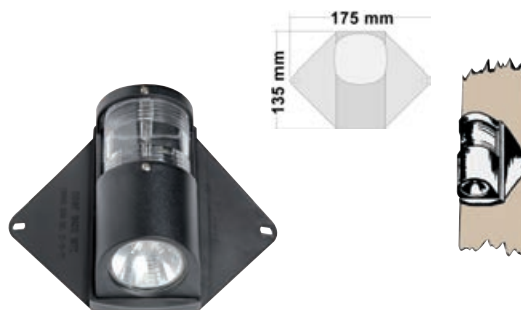


Navigation and deck LED light for boat up to 20 m

LED



225° LED navigation lights 11.060.03 paired with deck LED light.
Technopolymer body with flexible wings that adapt to any kind of mast.
Certified EN60945 - COLREG 1972 + USCG + ABYC A-16.

Code	Light	Deck light	Body	V
13.243.88	11.060.03	4x1W HD LEDs	Black technopolymer	9-33
13.243.89	11.060.03	4x1W HD LEDs	White technopolymer	9-33



▲ 13.243.88



▲ 13.243.89

Crosstree light made of stainless steel, fixed model

Stainless steel body fitted with watertight GE halogen bulb.

Code	Base	V	←→ mm		Spare light bulb	
			G.E. watertight bulb Ø	Base	12V	24V
13.243.90	Fixed	12	110	160x20	14.249.07; 14.249.11	-
13.243.91	Fixed	24	110	160x20	-	14.249.08
13.243.92	Articulated	12	110	140x32	14.249.07; 14.249.11	-
13.243.93	Articulated	24	110	140x32	-	14.249.08



▲ 13.243.90/91



▲ 13.243.92/93