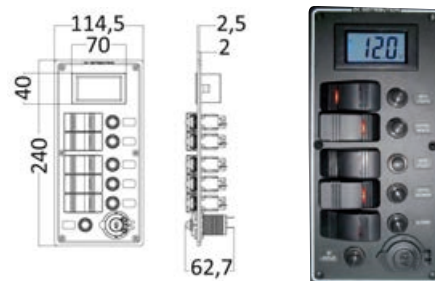## Electrical panel PCAL series with 9/32V digital voltmeter
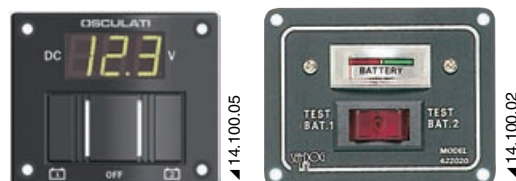
IP66 — Aluminium frame with black epoxy resin coating. Toggle switch with built-in activation LED. Watertight plug. Automatic resettable circuit breaker.

Code	Switches	Circuit breaker power	|←→| mm
14.863.05	1st = 3 positions for circuits (navigation lights) ON1 + ON2 + OFF; 2nd/3rd/4th = ON-OFF; 5th = temporary ON-OFF (horns)	1x5A; 3x10A; 1x15A; 1x15A (socket)	240x115

Panel with tester for 2 batteries and activation switch

Code	Indicator	Switch	Panel	|←→| mm
14.100.02	Analog	Light toggle	Black anodized aluminium	64x83
14.100.05	Digital	IP56 dual LED toggle	Technopolymer	75x60

Digital voltmeter display

Digital touchscreen to control 2 x 12V batteries.

Code	Frame	|←→| mm
14.659.01	Dark grey	60 x 60

Watertight electric control panel

Fitted with rubber caps. Equipped with voltmeter and battery isolator 14.385.00. Supplied with **led light check panel**. The fuses are separated on each switch. Watertight fuse holder. It requires standard glass fuses.

Code	Switches	Switches A	Fuse size mm	|←→| mm
14.708.00	10	15	6x32	270x160

Watertight electric control panel with circuit breakers

Fitted with rubber caps. Equipped with voltmeter and battery isolator 14.385.00. Supplied with **LED light check panel**. The fuses are separated on each switch. Watertight fuse holder requiring standard glass fuses. Fitted with Airpax fully **automatic** circuit breakers 14.736.10/20.

Code	Switches	Switches A	|←→| mm
14.709.00	10	15	270x160

Electric control panel with 14 switches

Equipped with voltmeter and ammeter, and battery isolator 14.385.00.
Equipped with extra bright **LED light check-panel**.
The LEDs lights up when a switch is activated.

Code	Label	switch	Fuses mm	|←→| mm
14.808.01*	sail yacht	15 A	6x30	327x285
14.809.00	power yacht	automatic thermo-magnetic "Airpax" 14.736.05; 14.736.10; 14.736.15; 14.736.20	-	327x285
14.809.01	sail yacht	automatic thermo-magnetic "Airpax" 14.736.05; 14.736.10; 14.736.15; 14.736.20	-	327x285

*   Fitted with watertight switch, coated with rubber and standard glass fuses.

AC power control panel, 220 V

Fitted with Airpax resettable automatic circuit breakers (1 x 5A, 3 x 5A, 1 x 15A) + switch LED lights + 30 m A and 25 A bipolar life saver switch + "power indicator" LED light + "polarity inversion" LED light + 0/300 V voltmeter.

Code	Magneto-thermic switches	External mm	Coupled with panel
14.810.22	5	140x285	14.809.00; 14.809.01