


### Europump Next Generation submersible bilge pump

CE-certified in compliance with the **ISO 8846/8849** directive.  
Extremely compact in size, fitted with backflow **check valve**.  
Removable hose connector adjustable at 360°.

| Code      | V  | Model | Flow l/min | Current draw A | Head m | Ø-Hose adaptor mm | 90° Hose adaptor Ø 29 mm OPTIONAL |
|-----------|----|-------|------------|----------------|--------|-------------------|-----------------------------------|
| 16.128.01 | 12 | 600   | 38         | 2.5            | 2.5    | 19/29             | 16.128.00                         |
| 16.128.05 | 12 | 1100  | 70         | 4.0            | 4      | 25/29             | 16.128.00                         |
| 16.128.06 | 24 | 1100  | 70         | 2.5            | 4      | 25/29             | 16.128.00                         |

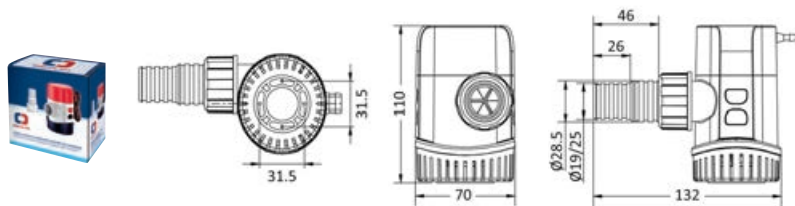

**OSCOLATI**



### Europump II automatic bilge pump

Very compact, with built-in electronic level sensor.  
ABS body, stainless steel shaft. Reduced current draw.  
Removable from plug-in base. CE certified by RINA in compliance with Law 94/25, directive ISO 28846/28849.

| Code      | Type     | V  | Flow l/min | Current draw A | Head m | Hose adaptor (Ø A) mm |
|-----------|----------|----|------------|----------------|--------|-----------------------|
| 16.124.01 | G600     | 12 | 38         | 2.5            | 2.5    | 19                    |
| 16.124.03 | G750     | 12 | 48         | 3              | 3      | 19                    |
| 16.124.04 | G750-24  | 24 | 48         | 1.6            | 3      | 19                    |
| 16.124.05 | G1100    | 12 | 70         | 4.0            | 3.2    | 29                    |
| 16.124.06 | G1100-24 | 24 | 70         | 2.0            | 3.2    | 29                    |


**OSCOLATI**



### Europump Next Generation automatic submersible bilge pump

CE-certified in compliance with the **ISO 8846/8849** directive.  
Compact in size, fitted with an electronic timer sensing automatic system to check the presence of water every 2.5 minutes for a duration of 0.5 seconds.  
Removable hose connector adjustable at 360°.  
Fitted with backflow **check valve**.

| Code      | V  | Model | Flow l/min | Current draw A | Head m | Hose adaptor Ø mm | OPTIONAL 29-mm Ø 90° hose adaptor |
|-----------|----|-------|------------|----------------|--------|-------------------|-----------------------------------|
| 16.129.01 | 12 | 600   | 38         | 2.5            | 2.5    | 19/29             | 16.128.00                         |
| 16.129.03 | 12 | 750   | 51         | 3.5            | 3.0    | 19/29             | 16.128.00                         |
| 16.129.04 | 24 | 750   | 51         | 2.0            | 2.0    | 19/29             | 16.128.00                         |
| 16.129.05 | 12 | 1100  | 70         | 4.0            | 4.0    | 25/29             | 16.128.00                         |
| 16.129.06 | 24 | 1100  | 70         | 2.5            | 2.5    | 25/29             | 16.128.00                         |

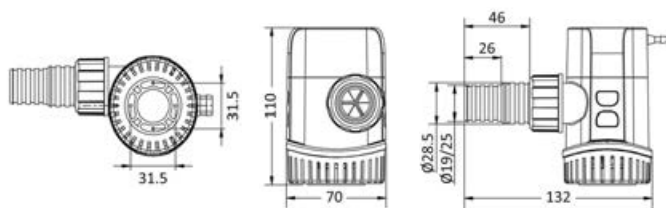

**OSCOLATI**



### Europump II automatic bilge pump

Manufactured in compliance with Law 94/25 and the Directive ISO 8846.  
The pump activates when the bilge water level is 7 cm and stops when water has been totally drained.  
CE certified by RINA in compliance with Law 94/25, directive ISO 28846/28849.

| Code      | Type   | V  | Flow l/min | Current draw A | Head m | Hose adaptor Ø mm | mm          |
|-----------|--------|----|------------|----------------|--------|-------------------|-------------|
| 16.122.30 | A-1500 | 12 | 96         | 8              | 4      | 29                | 150x150x100 |
| 16.122.32 | A-2000 | 12 | 128        | 11             | 4      | 29                | 150x150x100 |
| 16.122.33 | A-2000 | 24 | 128        | 6              | 4      | 29                | 150x150x100 |

**OSCOLATI**

