

Submersible pumps



Elephant automatic bilge pump

CE certified in compliance with Directive ISO 8846. Permanent-magnet motor, stainless steel shaft, watertight sealing electrical cables. It can be run in automatic or manual mode. Removable from plug-in base.

Code	Model	V	Flow l/min	Current draw A	Hose adaptor mm	←→ mm
16.123.01	500	12	32	1.8	19	151x78x105
16.123.02	750	12	50	3	19	151x78x105
16.123.03	1100	12	75	4	29	151x78x105
16.123.04	1100	24	75	2.2	29	151x78x105

Maxi submersible bilge pump

Made in compliance with the CE/ISO 8846-8849 standard. Silent, it can be pulled out of its base to be cleaned and can be automated by installing whatever circuit breaker having at least 20A power.

Code	Model	V	Max flow l/min	Current draw A	Max head m	Base Ø mm	Height mm	Hose connector B Ø mm
16.122.35	3500	12	221	16	8	139.5	182	40
16.122.36	3500/24	24	221	8	8	139.5	182	40
16.122.47	4700	12	296	17	8	139.5	182	50



New

Maxi submersible bilge pump

Made in compliance with the CE/ISO 8846-8849 and RoHS standards. Silent, the stainless steel shaft and valve prevent water backflow and jamming due to air pockets. The strainer can be pulled out to be easily cleaned.

With the new quick coupling system, the motor can be pulled out without disconnecting the base and the hydraulic connections. It can be automated by installing whatever circuit breaker having at least 20A power.

Code	Model	V	Max flow l/min	Current draw A	Max head m	Base Ø mm	Height mm	Hose connector B Ø mm
16.122.46	4700/24new	24	296	8	6.5	120	187	52



WHALE submersible pump

For suction or transfer of fresh or salt water.


Code	V	Flow l/min	Current draw A	Hose adaptor mm	Use
16.921.40	12	11	3	10/13	to be fitted into the tank
16.921.41	24	11	1.6	10/13	to be fitted into the tank
16.921.42	12	11	3	dual 10/13	in line
16.921.43	24	11	1.6	dual 10/13	in line



CARAVAN centrifugal submersible pump

Designed to be fitted into water cans.

Code	V	Flow l/min	Current draw A	Head m	Hose adaptor Ø mm
16.101.00	12	18	2	2	11

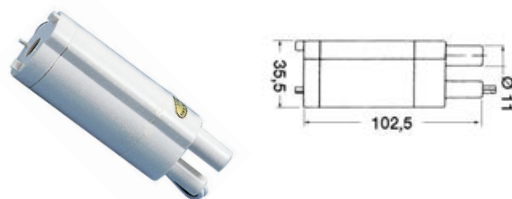

Submersible centrifugal pump

It pumps both water and diesel. Its cylindrical shape (41-mm Ø) can be easily fitted in jerrycans and tanks. It can turn continuously up to 20 minutes. It comes with 5-m cable and adjustable pliers.

Code	V	Flow l/min	Current draw A	Head m	Hose connector Ø mm	←→ mm
16.105.13	12	18	4.5	10	12	175.5x41.1

