


Heavy Duty Classic Evo recess-fit fresh water inlet

QUICK SWIVEL CONNECTION

PRESSURE REDUCING VALVE

Ideal when you want to use quayside fresh water: it reduces the pressure to 3 bars not to damage the pipes by means of an innovative compact system fitted with adjustable pressure regulator and brass check valve. The quayside water pipe snaps into a gardening-like hose connector (see code 36.189.02). BSP male 3/4" outlet thread.

White	Chromed	SS	mm		90° quick coupling fitting
			Recess Ø	inside projection	
16.445.53	16.445.73	16.445.83	69	110-110	Included

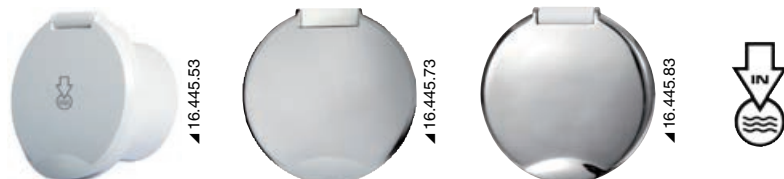

OSCULATI



Elissa hose connector for fresh water


AISI 316

QUICK SWIVEL CONNECTION

PRESSURE REDUCING VALVE

Ideal when you want to use quayside fresh water: it reduces the pressure to 3 bars not to damage the pipes by means of an innovative compact system fitted with orientable pressure regulator and brass check valve. The quayside water pipe snaps into a gardening-like hose connector (see code 36.189.02). BSP male 3/4" outlet thread. AISI316 stainless steel compartment and self-supporting hatch.

Code	mm	
	recess bore	inside projection
16.443.20	90x70	110-110

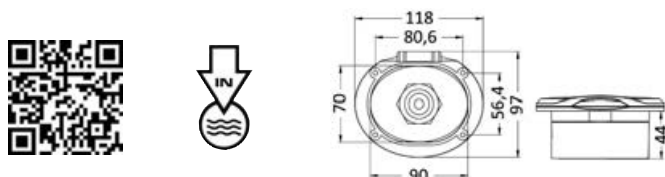

OSCULATI



Hose adaptor to be screwed on the rear of New Edge and Classic EVO pressure reducers

Code	Orientation
17.236.21	straight
17.235.01	90° angled
17.815.40	straight (plug-in hoses)



FLOJET docking hose connector and water pressure reducer

It sets pressure from the mains water supply at 3.1 bar in order to avoid damage to pumps and pipings.

Code	Version	Fittings	mm	Depth mm
16.441.11	in line	3/4" GHT thread	77x39	-
16.441.12*	recess-fit	1/2" NPT thread	103x110	87

* Male quick fitting included.

FLOJET

