



### Polyethylene pipe

Very high impact resistance. Excellent resistance to chemical. Outstanding flexibility.


Code	Ø mm	Colour	For water	Pressure bar	Roll m
17.112.25	12	 Red	hot	7	100
17.112.26	12	 Blue	cold	7	100



### Hydrofix plumbing connections, suitable for 70° max temperature

Immediate snap installation. A simple pressure of the hose on the fitting is enough to install it. The fitting is re-usable with replacement of the check ring. Polyamide fittings and polyethylene hoses. RINA type-tested fittings with MAC/119897/1TO/98 certificate.

Product description	15-mm Ø	22-mm Ø
Female/female sleeve	17.115.01	17.117.01
90° female/female elbow	17.115.02	17.117.02
90° female T	17.115.03	17.117.03
1/2" female/female brass joint	17.115.04	-
3/8" female/female brass joint	17.115.26	-
3/4" female/female brass joint	-	17.117.04
3/8" female/male brass joint	17.115.05	-
1/2" female/male brass joint	17.115.06	-
3/4" female/male brass joint	-	17.117.06
1/2" T brass joint for connection to accumulator tanks, boilers, etc.	17.115.07	17.117.17
3/4" T brass joint for connection to accumulator tanks, boilers, etc.	-	17.117.18
1/2" female/female brass elbow	17.115.24	-
3/4" female/female brass elbow	-	17.117.24
1/2" female/male brass elbow	17.115.25	-
3/4" female/male brass elbow	-	17.117.25
22x15-mm male/female reduction	-	17.117.29
22x15x22-mm reduced T	-	17.117.31
Male/female manifold with two 22x15x15x22 derivations, openable at the end	-	17.117.33
Male/female manifold with three 22x15x15x22 derivations, openable at the end	-	17.117.35
22x22x15-mm reduced T	-	17.117.37
Bush to fit into the tube, <b>NECESSARY to censure seal</b> (Ø15 = technopolymer; Ø22 = stainless steel)	17.115.11	17.117.40
Stainless steel check ring, to be replaced in case the joint is re-used	17.115.15	17.117.41
Spare threaded ring nut	17.115.16	17.117.42
Spare silicone O-ring	17.115.17	17.117.43
Spare plastic washer	17.115.18	17.117.44
150-mm Ø curve with fastening screw	17.115.19	-
Shut-off valve	17.115.20	-

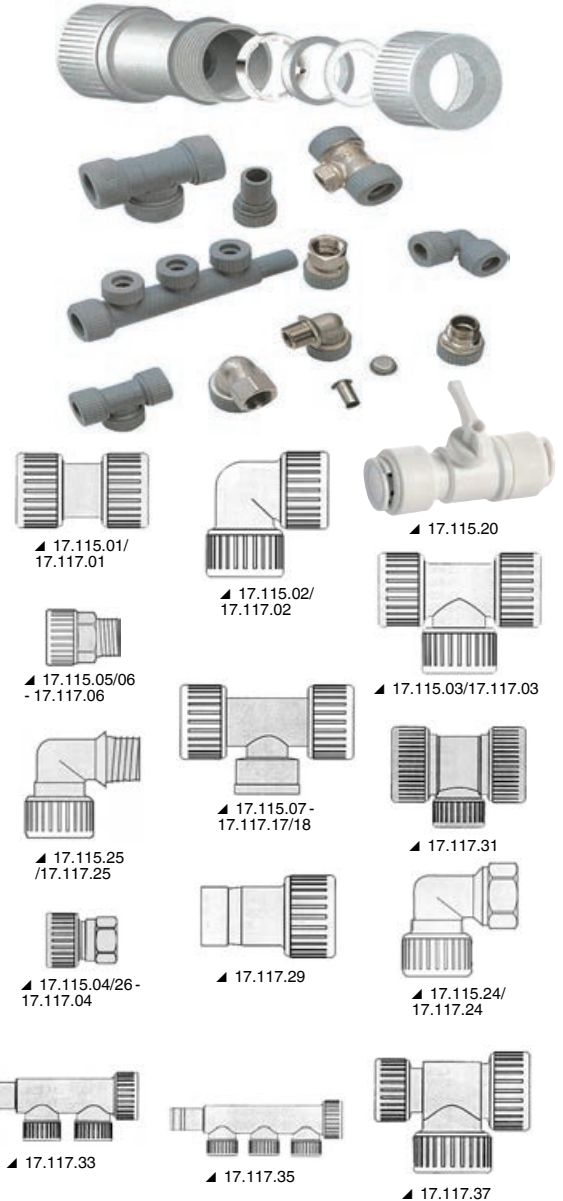

### Polyethylene tube

Very high impact resistance. Excellent resistance to chemical. Outstanding flexibility. Bend radius min. 120 mm.

Blue	Red	Ø mm	Pressure bar	Roll m
17.115.09	17.115.10	15	7	100
17.117.09	17.117.10	22	7.5	50



### Pipe cutter

Suitable for semirigid pipes size 12/15/22 mm.

Code	For pipes
17.117.50	17.112.25; 17.112.26; 17.115.09; 17.115.10; 17.117.09; 17.117.10; 17.815.52; 17.815.54

