


ITALWINCH stainless steel windlasses



ITALWINCH Smart windlass

AISI 316

Polished AISI316 stainless steel body. It can use chain or rope/chain. Built-in chain counter sensor. IP67 watertight motor. For boats up to 10 m.



GD + gypsy	GO	Motor		Current draw A	Ø Chain gypsy mm	Line Ø mm	Max pull kg	Working load kg	Line speed m/min	kg
		V	W							
02.401.31	02.401.21	12	500	60	6	12	650	90	23	8.5/9.5
02.401.33	02.401.23	12	700	90	6	12	750	100	25	8.5/9.5
02.401.34	02.401.24	12	700	90	8	12	750	100	25	8.5/9.5
02.401.35	02.401.25	12	1000	115	8	14	930	130	26	13/14.5

ITALWINCH Smart-R1 windlass

AISI 316

AISI316 stainless steel vertical windlass with aluminium round base. Built-in chain counter sensor. IP67 watertight motor. For boats up to 10 m.

Round base without drum	Motor		Current draw A	Ø Chain gypsy mm	Line	Max pull kg	Working load kg	Line speed m/min	kg
	V	W							
02.413.01	12	500	60	6	no	650	90	23	8
02.413.03	12	700	90	8	no	750	100	25	8.5




ITALWINCH Smart "V" windlass

AISI 316

Polished AISI316 stainless steel body. Vertical windlass for easy installation. It uses chain or rope/chain. Built-in chain counter sensor. IP67 watertight motor. For boats up to 8 m.

GO	Motor		Current draw A	Ø Chain gypsy mm	Line Ø mm	Max pull kg	Working load kg	Line speed m/min	kg
	V	W							
02.402.01	12	500	60	6	12	285	90	23	8/8.5
02.402.03	12	800	90	8	12	315	105	25	8/8.5

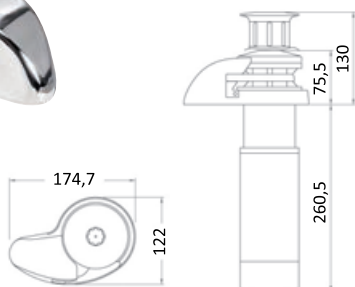

ITALWINCH Smart Plus windlass

AISI 316


Polished stainless steel body. It uses chain or rope/chain. Built-in chain counter sensor. IP55 watertight motor. For boats up to 15 metres.

GD + gypsy	GO	Motor		Current draw A	Ø Chain gypsy mm	Line Ø mm	Max pull kg	Working load kg	Line speed m/min	kg
		V	W							
02.404.42*	02.404.32*	12	1000	115	8	14	420	140	23	15.5/16.5
02.404.44*	02.404.34*	24	1000	60	8	14	420	140	23	15.5/16.5
02.404.46**	02.404.36**	12	1500	130	10***	16	480	160	23	15.5/16.5
02.404.48**	02.404.38**	24	1500	70	10***	16	480	160	23	15.5/16.5
02.404.50	02.404.40	24	1700	75	10***	16	720	240	25	19.5/20.5

* 6-mm gypsy available.

** 8-mm gypsy available.

*** Chain gypsy ISO (10x30), also available with gypsy for DIN766 (10x28).

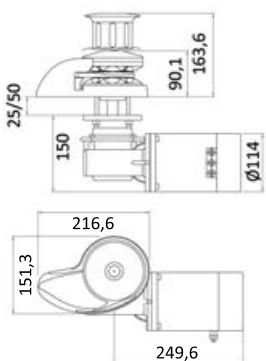

ITALWINCH Smart-R3 windlass

AISI 316

AISI316 stainless steel vertical windlass with round base. Built-in chain counter sensor. IP67 watertight motor. For boats up to 16 m.

Round base without drum	Motor		Current draw A	Ø Chain gypsy mm	Line	Max pull kg	Working load kg	Line speed m/min	kg
	V	W							
02.414.01	12	1000	115	8	No	930	130	25	17

