

## Portable compasses



### RIVIERA compass with soft casing

**Impact resistant**; fitted with neck strap; ideal for surfing, for small boats or as emergency compasses and as bearing compasses as they have a front and double upper reading; 5° to 5° rose graduation, pin suspension, **floating**. Models:

- "MIZAR": with fixed ring  
- "ORION": with external turning ring

Model		Color	Ø apparent rose
MIZAR	ORION		
25.066.04	25.066.08	blue	1"7/8
25.066.02	25.066.06	yellow	1"7/8
25.066.01	-	grey	1"7/8
25.066.03	-	red	1"7/8

## Bearing compasses

### Bearing and steering compass



**25.900.00** Fitted with magnifying glass, double scale in grades and points, very stable, very clear night reading, side scale meter, kerosene suspension, 1° estimate possible. Specially suited for dinghies or small boats.

### Bearing and steering compass "Japanese YCM"



**25.350.00** Fitted with magnifying glass, clear reading and very stable double scale, kerosene suspensions, 1° estimate possible; ideal for dinghies.


### Pocket compass



**Black ABS body, liquid-filled rose**, swivelling gimbal ring fitted with an arrow to determine the route. Blister packaging.

Code	Rose Ø mm
25.950.00	45

### Bearing compass CD703L



Liquid-filled compass with **rotating** rose, scale meter and foldable sight frame.


Code	open mm
25.703.00	57x160

### Bearing compass PRISMA with case



Code	Description
25.065.02	Model fitted with graduated circle of 1° in 1°, liquid suspension, straight prism reading; equipped with temperature variation adsorbing diaphragm, battery light. It can also be used as a steering compass.
25.065.03	Prisma compass wooden box.

### Mini Compass 2000

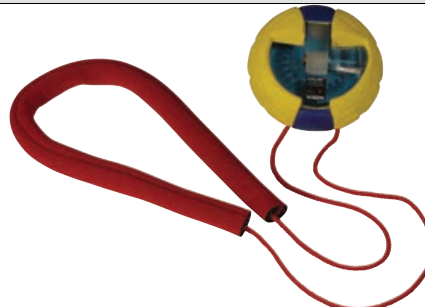

Compass fitted with **rubber** anti-shock housing. BETA ray permanent lighting. Magnifying lens for use as both bearing compasses and steering compasses. It uses the twenty-year-old unmatched **direct vision** system without lubber lines. The rose image is enlarged **10 times**; no parallax, 0.5° interval estimate. Excellent rose stability and quickness.

Code	Ø mm	Thickness mm	Weight g
25.420.30	80	29	120