


Turned Rigging screws

Made of mirror polished **AISI 316 stainless steel**; fine finish, sliding threads, generously sized to provide a strong adjusting travel.


Code	Thread D1 MA	L1 mm	A mm	D mm	H mm	LG mm	Working load kg
07.192.04	4	115	4.5	4	8	175	410
07.192.05	5	127	5.5	5	10	195	460
07.192.06	6	150	6	6	10	230	910
07.192.08	8	180	8	8	11	255	1330
07.192.10	10	220	10.2	9	14	300	2180
07.192.12	12	270	14	12	20	380	3200
07.192.14	14	290	13	12	20	328	4300
07.192.16	16	340	17	12	26	480	5310
07.192.20	20	340	20	19	29	387	7940

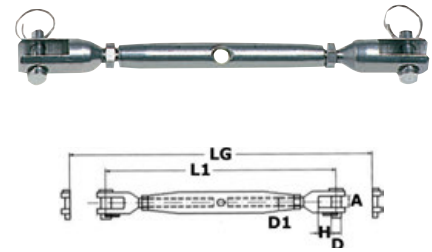

Turned rigging screws with press-fitting terminal for stainless steel cables

Mirror-polished in **stainless steel AISI 316**. Precise finish, sliding threads, generously sized for a strong adjustment range.


Code	Thread D1 MA	Line Ø mm	L1 mm	A mm	H mm	LG mm
07.194.06	6	3	180	6	10	250
07.194.08	8	4	210	8	11	285
07.194.10	10	5	240	10.2	14	330
07.194.12	12	6	300	14	20	410

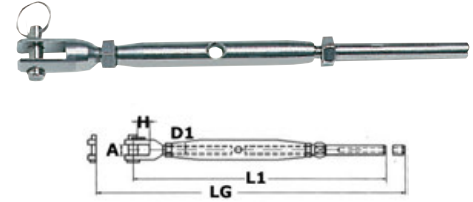

Rigging screws with built-in stainless steel allen spanner terminals

Made of **AISI 316 stainless steel**, suitable for **lifecycle** ends.


Code	For bare cables Ø mm	For coated cables mm	A mm	B mm	C mm	D mm
07.190.06	5/6	6	170	240	6.2	12

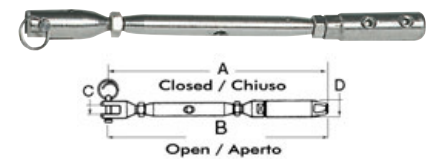

Turned rigging screws with built-in terminal suitable for Parafil cables

AISI 316 stainless steel.


Code	Line Ø mm	A mm	B mm	C mm	D mm
07.196.07	7	187	240	6	13
07.196.09	9	190	240	6	14

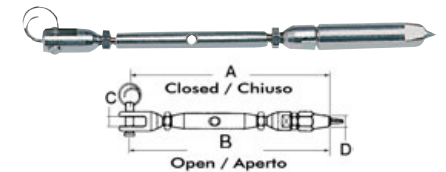

Rigging screws with self-locking terminal

Made of **AISI 316 stainless steel**. The inner cone **automatically blocks** the cable when inserting it.


Code	Thread D1 MA	Line Ø mm	A mm	B mm	C mm	Working load kg
07.385.06	6	3	175	245	7.5	170
07.385.08	8	4	200	285	11	304
07.385.10	10	5	245	335	12	474
07.385.12	12	6	290	405	14	571

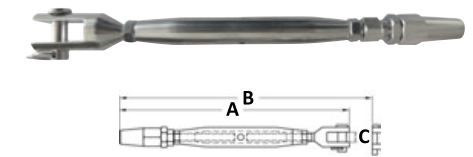

Rigging screws with two fixed jaws

AISI 316 stainless steel.


Code	Thread D1 MA	L1 mm	L mm	A mm	D mm	H mm	Working load kg
07.198.05	5	120	70	6.5	5	10	400
07.198.06	6	140	90	7.5	6	10	600
07.198.08	8	180	120	11	8	11	1000
07.198.10	9	220	150	12	9	14	1400
07.198.12	12	300	200	14	12	20	2400

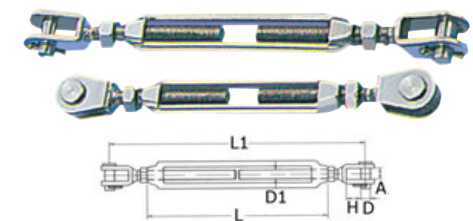

Eye to Eye Rigging screws

AISI 316 stainless steel.

Code	Thread D1 MA	L1 mm	L mm	A mm	Working load kg
07.193.04	4	100	60	7	87
07.193.05	5	120	70	8	160
07.193.06	6	150	90	10	320
07.193.08	8	200	120	14	560
07.193.10	10	240	150	16	880

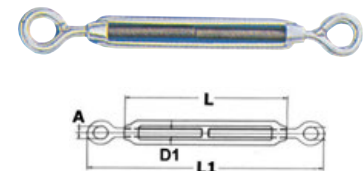

Turnbuckle with two articulated jaws

AISI 316 stainless steel.

Code	Thread D1 MA	L1 mm	A mm	D mm	H mm	LG mm	Working load kg
07.195.06	6	160	7	6	15	230	600
07.195.08	8	190	10	8	20	265	1000
07.195.10	10	230	12	9	25	320	1400
07.195.12	12	280	13	12	30	390	2400

