

## Water tanks

**OSCULATI**

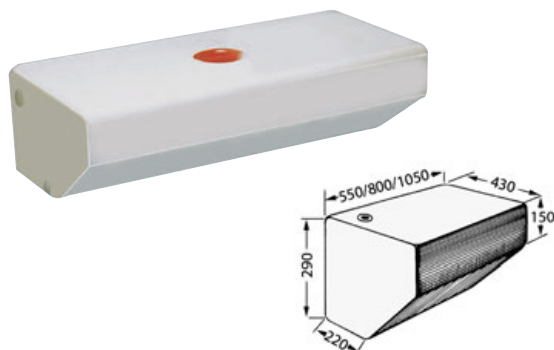

### Fresh water rigid tank, rectangular version

In **white polyethylene** standard version with rectangular section.  
Suitable for installation in the central part of the hull or under the bow bed.  
Supplied complete with inspection cap and 4 blind threaded holes from 1/2" - 1" 1/4 where the loading/unloading hose connectors, vent (see various models at group 17), must be ordered separately.

Code	Capacity l	Base mm	Height mm	Standard thickness mm +/- 5%**
52.194.49	54	700x400	200	4
52.194.50	47	480x400	260	4
52.194.51	70	710x400	260	4
52.194.69	105	900x400	300	4.5
52.194.70	80	700x400	300	4.5
52.194.71	119	880x500	300	4.5
52.194.72*	170	880x500 - 880x400	400-500	5

\* It can be rotated at 90° and used with height of 400 mm or 500 mm (fitted with **double series of outlets and inspection cap**).

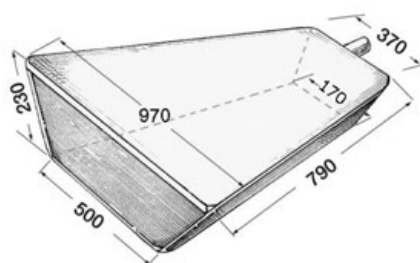
\*\* Our fresh water tank thickness is calculated for standard use of tanks to be installed on leisure boats. The installer or the designer shall be responsible for checking that both the tanks and their mounting systems comply with the required use. Technical support shall be requested, if necessary. The option to require on demand tanks increased in thickness.



### Fresh water rigid tank, tapered version

Made from **linear food-grade polyethylene**.  
They are flared on the side to perfectly adhere to the hull.  
They are tasteless and odourless.  
Supplied complete with inspection cover for cleaning and blind threaded holes for drainage and venting at 1/2" and 1" 1/4 for loading.  
(For hose connection see various models in group 17 and 52).

Code	Capacity l	Plan mm	Height mm
52.195.50	46	430x550	290
52.195.75	70	430x800	290
52.195.10	100	450x1020	300



### Rigid water tank

In **white polyethylene**, triangular flared for the bow.  
Complete with 4 blind threaded holes from 1/2" - 1" 1/4 where the hose connectors for loading, unloading, and venting are screwed (see various models in group 17).

Code	Capacity l	Standard thickness mm +/- 5%
52.194.00	80	5*

\* Our fresh water tank thickness is calculated for standard use of tanks to be installed on leisure boats. The installer or the designer shall be responsible for checking that both the tanks and their mounting systems comply with the required use. Technical support shall be requested, if necessary. The option to require on demand tanks increased in thickness.

**OSCULATI**


### White polypropylene tank, suitable for fresh water, holds 60 litres; designed for wall mounting

Suitable for mounting behind cabinets or in cavities.  
Complete with female threads of 1/2" - 3/4" - 1" 1/2 for loading, unloading, venting + level indicator flange.

Code	Capacity l	←→  mm	Max length for float cm	Standard thickness mm +/- 5%*
52.145.78	60	450 x 350 depth x 670 total height	60	5

\* Our fresh water tank thickness is calculated for standard use of tanks to be installed on leisure boats. The installer or the designer shall be responsible for checking that both the tanks and their mounting systems comply with the required use. Technical support shall be requested, if necessary. The option to require on demand tanks increased in thickness.