



Wind Shell modular Venting System




53.520.01



Wind Shell Venting system

UV-resistant ABS body. Push the central button to open and close. Perfectly watertight when closed. Can be installed with shell cover to maximise airflow/protection


Code	Description	Notes
53.520.01	Open / Close valve	It can be installed without grid.
53.520.02	Hull	-
53.520.03	Coupling + ring	For thickness up to 120 mm

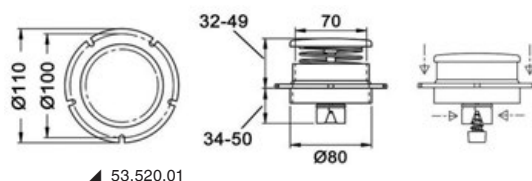

53.520.01



53.520.02



— Carena (53.520.02)
Cover




— Valvola apertura / chiusura (53.520.01)
Open / Close valve



— Manicotto est. Ø86 - int. Ø81,2 (53.520.03)
Coupling ext. Ø86 - int. Ø81,2




— Collarino per manicotto
Ring for coupling

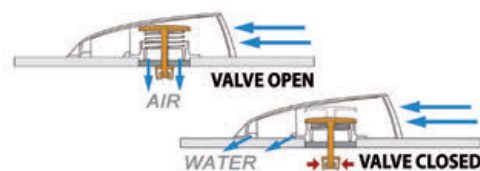

Può essere usato per far entrare o estrarre l'aria.
Can be used for air intake or outtake

Mushroom vents, hatch vents and louvred vents

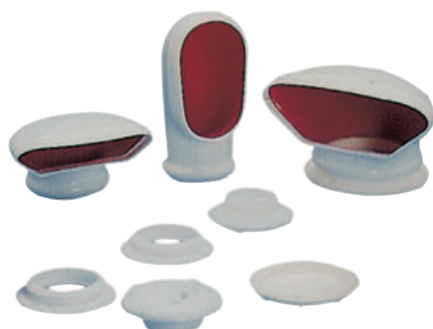

Watertight vents - ventilite/ventair

Made of white flexible PVC, swivelling, fitted with locking cap.

Code	Profile type	neck mm	Height mm	Width mm	Base Ø mm
53.135.93	lowered	70	90	160	112
53.135.94	lowered	100	150	185	142
53.135.95	traditional	70	230	110	112
53.135.96	traditional	100	250	140	142