

“Servo 22”

Fitted with screws, packed in clear bags with display packaging.

Code	Suitable for lines mm	Hole spacing mm	Height mm
56.022.00	6/12	42	22
56.022.01	6/12	40	22
56.022.02	6/12	37	22

**“Servo 33”**

Fitted with screws, packed in clear bags with display packaging.

Code	Suitable for lines mm	Hole spacing mm	Height mm
56.033.00	10/14	52	31

**CLEAT SPRING SERVO 44**

Sliding features, flat built without plastic base and oversized axis, fitted with screws.

Code	Suitable for lines mm	Hole spacing mm	Height mm
56.014.00	10/14	52	27

**Sheet guide for Servo 22**

Code 56.022.10

Optional (lower guide as per picture Servo 11), positioned under the clamp.

**Over sheet fairlead**


Horizontal, fitted with plates.

Code	For servo	Centre distance mm
56.022.40	22	40
56.022.33	33/44	52

**AISI316 stainless steel clam cleats****AISI 316**

Made of precision-cast AISI 316 stainless steel, fitted with conic locking teeth, mirror polished finish.

Code	Material	Ropes mm	A mm	B mm	C mm
56.304.06	AISI 316	3/6	82	66	18
56.305.06	AISI 316	3/6	55	27	17
56.306.06	AISI 316	3/6	48	36	15

**OSCULATI****Downhaul and towers****Cam cleat swivel base**

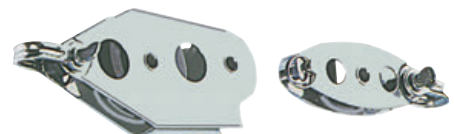
Made of anodized aluminium with ball bearing cam cleat.

Code	For blocks
56.266.00	55.026/029/030/031.xx

Low cam cleat swivel base

Fitted with fairlead and aluminium ball clam cleat.

Code	For sheets up to mm
56.268.00	8

Tripping line

Made of **stainless steel**, extra sturdy, Italian product.

Code	Ropes mm
56.314.10	5/7