



Travellers for vessels up to 6 metres




Code	Description
62.139.10	Free Way sheet traveller, with four nylon rolls, suitable for boats up to 6 m
62.139.30	Rail for travellers 62.139.10 by the metre, 2-m pieces (18x23 mm)
62.139.50	Plastic terminal for rail 62.139.30

Double ball bearing trolleys for 19 mm rails

Anodized aluminium body, Delrin balls, stainless steel reinforcements.

Dimensions of the cart		Rail dimensions	
A 51 mm		A 19 mm	
B 20 mm		B 13.4 mm	
Trolley length 83 mm		Holes 5 mm	

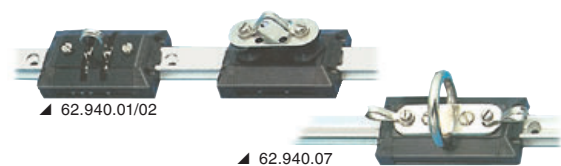


Code	Characteristics	Working load kg
62.940.01	Short traveller with swiveling block. Particularly indicated when the traction is off-axis at least 10/15°. Maximum load 200 kg.	220
62.940.02	Short traveller with fixed block and return pulley. Maximum load 200 kg.	220
62.940.07	Traveller for spinnaker pole link.	220



Code	l mm	hole Ø mm	Bars m	Material	Terminal OPTIONAL
62.940.08	19x13.4	5	2	Anodised aluminum	62.940.09
62.940.14	19x13.4	5	2	hard anodized aluminium + PTFE	62.940.09

Double ball bearing trolleys for 25 mm rails

Black anodized aluminium, Delrin sphere and stainless steel reinforcements



Rail size	
A	25 mm
B	16 mm



Traveller with bridge

Code	Length mm	Width mm	Working load kg	OPTIONAL rail
62.247.00	86	60	270	62.244.50; 62.244.51



Long traveller

Code	Length mm	Width mm	Working load kg	OPTIONAL rail
62.244.40	150	60	470	62.244.50; 62.244.51



Stainless steel end stop

Code	Description
62.244.80	Terminal with return block and cam cleat for rail 62.244.50; 62.244.51