

Rail 25 mm

Code	mm	hole Ø mm	Bars m	Material	Terminal OPTIONAL
62.244.50	25x16	5	2	Anodised aluminum	62.244.60
62.244.51	25x16	5	2	hard anodized aluminium + PTFE	62.244.60



▲ 62.244.50



▲ 62.244.51



▲ 62.244.60

Ball carriages for 31 mm rails

Traveller with tilt shackle

Made ready for return blocks size 10 mm (model 55.072.10).

Code	Length mm	Width mm	Working load kg
62.248.00	135	83	900



Aluminium tracks

Code	mm	hole Ø mm	Bars m	Material	Terminal OPTIONAL
62.248.50	31x19	6	2	Anodised aluminum	62.248.60



▲ 62.248.60




Falchetta profiles and accessories in stainless steel AISI 316

OSCULATI

Toerails

Made of natural **anodized aluminium**, fitted with **cover strip** and hooking rail for stanchion base sockets

Code	Base mm	Height internal mm	Angle between the two sides	Bars m
62.410.01	44	52	80°	6

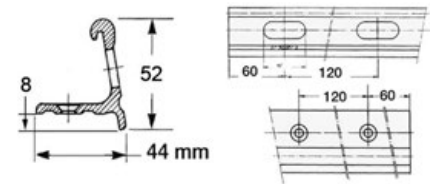

Toerail base

AISI 316

Manufactured in mirror-polished AISI 316 stainless steel for 25 mm stanchions.
They **attach themselves** to the upper edge of the gunwale.

Code	Version	Base mm	Height mm	Recommended for
62.410.04	sloped at 7°	55x73	65	62.410.01
62.410.05	straight at 90°	55x73	65	62.410.01





Roller fairlead for Toerail

AISI 316

Made of mirror polished AISI 316 stainless steel.

Code	Version	For ropes up to mm	Base mm	Height mm	Recommended for
62.410.06	Right	26	210x44	52	62.410.01
62.410.07	left	26	210x44	52	62.410.01
62.410.09	Central	26	180x44	52	62.410.01

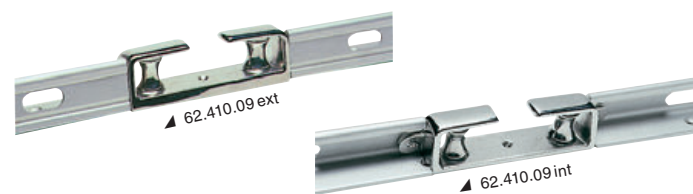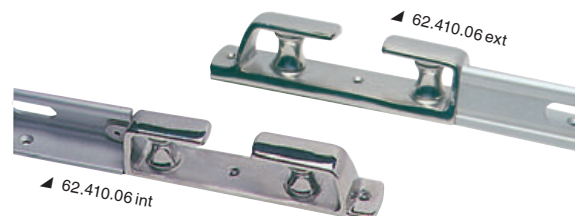

Stanchion base for Toerail

Made of **anodized aluminium**, designed for stanchion size 25 mm (like model 41.174.40; 40.173.39/40/41). Integrates with the toerail on installation.

Code	Version	Bore Ø mm	Recommended for
62.403.01	sloped at 7°	25	62.410.01
62.403.02	straight at 90°	25	62.410.01

