


Sound-deadening, sound-insulating and thermal-insulating materials R.I.Na certified in compliance with ISO 4589-3





Polyurethane foam sound-deadening panels

Film-coated version that doesn't absorb water. UL94 HF1 flame-retardant.

Code	Sheets of cm	Thickness mm	Density m ³	kg	Sound absorption A*	Sound impedance B	Temperature resistance*
65.099.00	100x200	20/35	30 kg	0.85 kg/m ²	2	1	1

* Evaluation scale 1 to 8.





Sound-deadening ISO 4589-3 polyurethane panels

Aluminised polyurethane panel. 25-mm thick 70/90 kg/m³ polyurethane, adhesive film. Type-tested in compliance with ISO 4589-3 defining the oxygen index by means of a high temperature test.

R.I.N.A. certified for soundproofing of engine rooms in pleasure boats up to 24 m.

Code	Sheets of cm	Thickness mm	Density m ³	kg	Sound absorption A*	Sound impedance B	Oxygen index
65.091.00	100x150	25	70/90 kg	2.4 kg/m ²	4	3	>21

* Evaluation scale 1 to 8.



New

Soundabsorbing and soundinsulating panel with white glassfiber fabric




- 1) White glassfiber fabric;
- 2) 15-mm thick 30 kg/m³ polyurethane.
- 3) 2-mm thick EPDM mass (4 kg/m³).
- 4) 10-mm thick 30 kg/m³ polyurethane.
- 5) Adhesive.

Type-tested in compliance with ISO 4589-3 defining the oxygen index by means of a high temperature test.

R.I.N.A. certified for soundproofing of engine rooms in pleasure boats up to 24 m.

Code	Sheets of cm	Thickness mm	kg	Sound absorption A*	Sound impedance B	Oxygen index
65.100.50	100x150	28	5.26 kg/m ²	6	5	>21

* Evaluation scale 1 to 8.

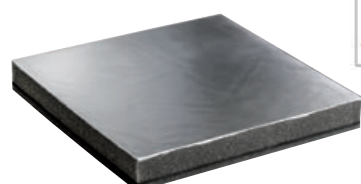

Sound-deadening and sound-insulating ISO 4589-3 fiberglass panels

- 1) 430 g/m³ aluminised fiberglass fabric.
- 2) 15-mm thick 30 kg/m³ polyurethane.
- 3) 2-mm thick EPDM mass (4 kg/m³).
- 4) 10-mm thick 30 kg/m³ polyurethane.
- 5) Adhesive.

Type-tested in compliance with ISO 4589-3 defining the oxygen index by means of a high temperature test.

R.I.N.A. certified for soundproofing of engine rooms in pleasure boats up to 24 m.

Code	Sheets of cm	Thickness mm	kg	Sound absorption A*	Acoustic impedance B*	Oxygen index
65.100.00	100x150	28	5.26 kg/m ²	6	5	>21
65.100.75	100x75	28	5.26 kg/m ²	6	5	>21

* Evaluation scale 1 to 8.

