

Sound-deadening and sound-insulating ISO 4589-3 fiberglass panels


- 1) 430 g/m³ aluminised fiberglass fabric.
- 2) 10-mm thick 70/90 kg/m³ polyurethane.
- 3) 2-mm thick EPDM mass (4 kg/m²).
- 4) 10-mm thick 70/90 kg/m³ polyurethane.
- 5) 2-mm thick EPDM mass (4 kg/m²).
- 6) 10-mm thick 70/90 kg/m³ polyurethane.
- 7) Adhesive.

The double separate mass ensures optimum soundproofing. For optimum sound insulation in cabins adjoining engine rooms.

Type-tested in compliance with ISO 4589-3 defining the oxygen index by means of a high temperature test.

R.I.N.A. certified for soundproofing of engine rooms in pleasure boats up to 24 m.

Code	Sheets of cm	Thickness mm	kg	Sound absorption A*	Sound impedance B	Oxygen index
65.097.01	100x150	35	12.66 kg/m²	7	8	>21

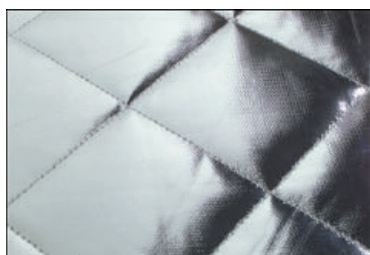

Sound-deadening quilt, heat-insulation up to 700°

It is a felt mat of glass fibre, coupled by quilting to two glass fabrics of 400 g, one of which is aluminized.

Stylish design, it is resistant to elevated mechanical strain. Particularly indicated as thermo acoustic isolator.

Code	Thickness mm	Roll
65.093.00	10	1 m x 10 m

Fits perfectly to the walls and can be glued or fixed with washers 65.098.00. Price per coil.



65.098.00 OPTIONAL washers




VETROTEX fiberglass mat

Sound-deadening, noise-insulating, fitted with aluminized fiberglass on the external side. Used as **anti-heat** covering on exhaust pipes, heat exchangers and on any piping needing to be insulated. Price by the single roll.

Code	Thickness mm	Fireproof	Roll
65.096.00	10	class 1	20 x 500 cm

Adhesive aluminium tape roll



designed to finish sound-deadening noise-insulating panels 65.094.00 after they are modelled and mounted

Code	Roll m	Height mm
65.095.00	50	50

CIBA marine glue



Made with phenolic resins, dark red colour, fitted with powder catalyst. It's the most powerful glue in the world, used to glue wood, resin, polyester, metals, etc.

Code	Package	Type-approval
65.225.11	500g	RINA

Self-extinguishing glue for sound-insulating/sound-deadening panels



Sound-insulating glue that optimizes the performance of the panels it is applied to.

Code	Package	Type-approval	Yield gr/mq
65.100.02	0.7501	RINA	350/400

Plastic toothed washers



For fixing sound-deadening panels onto ceilings or bulkheads. Screws not included.

Code	Ø mm	Hole mm	Package
65.098.00	50	3	250 pcs.
65.098.40	50	3	40 pcs. (blister)



ADEBOND professional cianoacrylic bonding

It sticks immediately metal, plastic, rubber, wood, leather, artificial leather, etc... Dispenser package.

Code	kg
65.236.21	50