

### SCOPREGA GE 900 and GE 900AA- PLUS electric inflators

High-flow electric inflators to inflate tents, games, structures, and inflatable barriers (GE 900), kayaks, and any inflatable boat (GE 900AA+ PLUS) quickly and with significantly reduced noise impact (max 85 dB).

Supplied with Ø 25-mm inflation tube 1.5 m long and universal fittings.

| Code                        | Model      | Functions             | V   | W   | Flow l/min | Pressure           | Current draw A | ↔ mm            |
|-----------------------------|------------|-----------------------|-----|-----|------------|--------------------|----------------|-----------------|
| <b>66.448.04</b> <b>New</b> | GE 900     | Inflation + deflation | 220 | 700 | 1700       | 170 mbar (2.5 psi) | 3              | 170 x 230 x 170 |
| <b>66.448.05</b>            | GE 900AA + | Inflation + deflation | 220 | 900 | 1700       | 250 mbar (3.6 psi) | 4              | 230 x 170 x 220 |



### BRAVO GE 20-2 electric inflator

Designed to meet all requirements, it inflates at high volume.

Technical characteristics:

- Ergonomic handle.
- High-efficiency and low-noise electric inflator.
- Double-piston pumping unit.
- Auto stop when selected pressure is reached.
- Fast connection to cigarette lighter plug.
- Battery life LED indicator.
- 12V built-in DC battery rechargeable via cigarette lighter plugs or 110-240 AC/DC transformers.
- Fitted with 12V with battery clips.
- Inflation connectors suitable for the most common valves.

| Code             | Functions | V  | W   | Flow l/min | Max pressure     | Current draw A | ↔ mm        | Sand filter |
|------------------|-----------|----|-----|------------|------------------|----------------|-------------|-------------|
| <b>66.449.20</b> | Inflation | 12 | 108 | 125        | 1,5 bar (22 PSI) | 9              | 200x320x220 | Yes         |



### Inflator BRAVO 230/2000

It consists of a main motor + booster to increase flow and pressure. The two motors can work in parallel or the main motor operates alone: this choice is possible by means of the two starting buttons (orange and red).

| Code             | Functions           | V   | W    |              | Flow l/min |              | Pressure |              | ↔ mm        |
|------------------|---------------------|-----|------|--------------|------------|--------------|----------|--------------|-------------|
|                  |                     |     | Base | With booster | Base       | With booster | Base     | With booster |             |
| <b>66.446.93</b> | Inflation+deflation | 220 | 1000 | 2000         | 1200       | 5 PSI        | 2 PSI    | 5 PSI        | 320x170x260 |



### ATMOS Integrated Air Station 12V

**IPX6**

**INFLATE/DEFLATE**

**IGNITION PROTECTION**

The built-in ATMOS onboard inflator combines a high airflow able to reach high pressures (20 psi / 1.37 Bar).

Suitable for any type of inflatable: tender, SUP, towables

Waterproof (IPX6) and designed to withstand harsh marine environmental conditions.

The next-generation technology provides fast and effortless inflation and deflation.

Compact and flat, ATMOS fits almost all panels on board. It comes with inflation tube (2.5 mt.) and a universal valve fittings kit.

User-friendly and ready for use: you just have to set the target pressure on the display and start it. The inflator automatically stops when the desired pressure is reached.

ATMOS is ignition protection certified (ISO 8846), allowing the inflator to be installed near boat areas containing flammable gases or fuel. It complies with EMC CE-RED directive (2014/53/EU) and EN 62368 standard.

Comes with a comfortable and durable Storage Bag complete with accessories.

Average inflation time for SUP: 6-8 minutes.

Certifications: CE, ROHS, UN ECE R10, UKCA

Compliant with standards: ISO 8846 and SAE J1171

| Code             | Scanstrut Code | Function            | V  | W   | A  | Max pressure      | Flowrate / Pressure                          | Installation angle | ↔ mm        |
|------------------|----------------|---------------------|----|-----|----|-------------------|----------------------------------------------|--------------------|-------------|
| <b>66.452.01</b> | SC-AOB-A2      | Inflation+deflation | 12 | 140 | 12 | 1.37 BAR (20 PSI) | 350 l/min (0-1 PSI)<br>~ 70 l/min (1-20 PSI) | +10° to -30°       | 297x123x198 |




**66.452.10** **New**

Sun Cover white ATMOS optional to the black one.



▲ 66.452.10

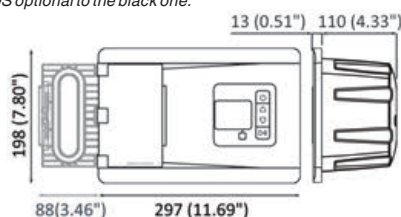

**SCANSTRUT**

