

Plastic walkway and courtesy lights



LED walkway light for recess mounting - frontal orientation

Clear plastic.

Code	V	W	K	LED beam angle	Light colour	mm	
						Ø Recess	Ø external
13.183.15	12	0.24	2850-3200	30°	white	9	12.7
13.183.16	12	0.24	-	30°	blue	9	12.7




LED courtesy light for recess mounting - frontal orientation

IP66

In white ABS.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm	
								Ø Recess	Ø external
13.183.08	12	0.24	4	2900-3200	30°	1	white	14x20 depth	28

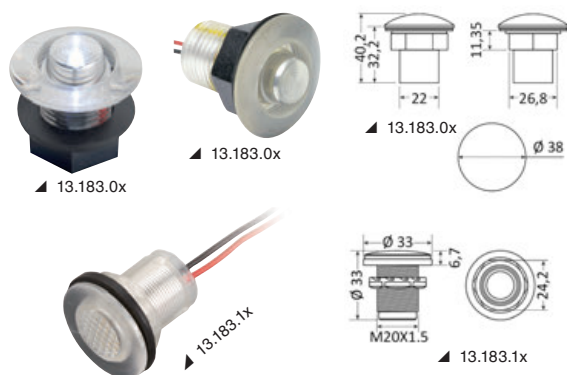


LED courtesy light for recess mounting - frontal orientation

IP68

In transparent polycarbonate. Through-mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm		
								Ø Recess	Ø external	Overhang
13.183.01	12	0.2	12.5	5500-6300	120°	1	white	22	38	8
13.183.02	12	0.2	2	-	120°	1	red	22	38	8
13.183.03	12	0.2	2	-	120°	1	blue	22	38	8
13.183.11	12	0.2	12.5	5500-6300	120°	1	white	20	31.6	5
13.183.13	12	0.2	2	-	120°	1	blue	20	31.6	5

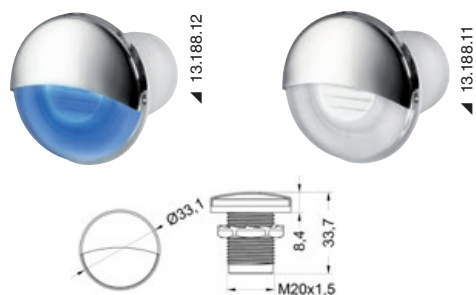


Recess fit LED courtesy light - downward orientation

IP68

In technopolymer with polished AISI 316 stainless steel eyelid. Through-mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm		
								Ø Recess	Ø external	Overhang
13.188.11	12	0.4	21	5500	120°	2	white	19.2	Ø 33,1	6
13.188.12	12	0.4	4	-	120°	2	blue	19.2	Ø 33,1	6

OSCULATI

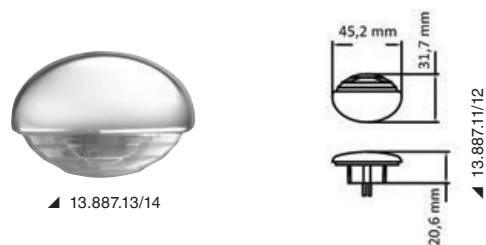

New

OSCULATI recessed LED courtesy lights

IP65

In technopolymer, complete with gasket.

Body colour		V	W	lumen	K	No of LEDs	Light colour	mm		
white	Chromed							Ø Recess	External Ø	Overhang
13.887.11	13.887.13	12	0.21	15	3000	1	White	14	45x31	7
13.887.12	13.887.14	12	0.21	5	-	1	Blu	14	45x31	7



LED courtesy light, recessless version - frontal orientation

FLUSH MOUNT

White plastic.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm
13.177.01	12	0.23	4	5500-6300	30°	2	white	43x19