


Recess fit LED ceiling light - frontal orientation

IP65

AISI 316

Polished precision-cast AISI316 stainless steel body. Pressure mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.429.90	12/24	1	110	3000	25°	1	white
13.429.91	12/24	1	45	-	25°	1	blue
13.429.95	12/24	3	190	3000	25°	1	white
13.429.96	12/24	3	74	-	25°	1	blue

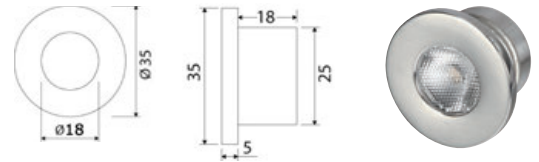


Recess fit LED ceiling light - frontal orientation

IP65

AISI 316

Polished precision-cast AISI316 stainless steel body. Pressure mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.429.80	12/24	1	110	3000	25°	1	white
13.429.81	12/24	1	45	-	25°	1	blue
13.429.85	12/24	3	190	3000	25°	1	white
13.429.86	12/24	3	74	-	25°	1	blue

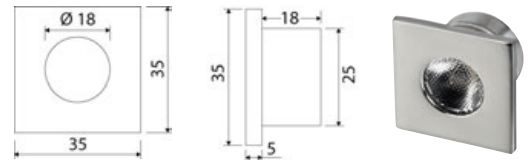

Recess fit LED courtesy light - frontal orientation

IP67

AISI 316

Polished precision-cast AISI316 stainless steel body. Pressure mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm	
								Exterior	Overhang
13.429.75	12/24	0.5	24	3000	25°	1	white	35x35	5
13.429.76	12/24	0.5	3	-	25°	1	blue	35x35	5




Recess fit LED courtesy light - downward orientation

IP67

AISI 316

Polished precision-cast AISI316 stainless steel body. Pressure mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm	
								Exterior	Overhang
13.429.60	12/24	0.4	23	3000	90°	1	white	35x35	5
13.429.61	12/24	0.4	4	-	90°	1	blue	35x35	5

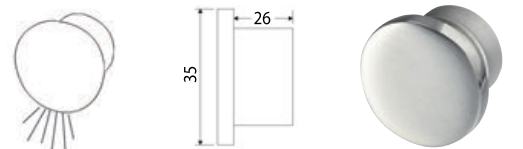

Recess fit LED courtesy light - dual upward/downward orientation

IP67

AISI 316

Polished precision-cast AISI316 stainless steel body. Pressure mounting.

Code	V	W	lumen	K	LED beam angle	No of LEDs	Light colour	mm	
								Exterior	Overhang
13.429.65	12/24	0.4x2	41	3000	90°+90°	2	white	35x35	5
13.429.66	12/24	0.4x2	7	-	90°+90°	2	blue	35x35	5

