


LED ceiling light for recess mounting

IP65

ABS body.


Code	Finishing	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.179.01	White	12	0.8	50	6000	30°	9	☐ white
13.179.02	Chromed	12	0.8	50	6000	30°	9	☐ white
13.179.11	White	12	0.5	20	-	20°	9	☒ blue
13.179.22	Chromed	12	0.5	20	-	20°	9	☒ blue

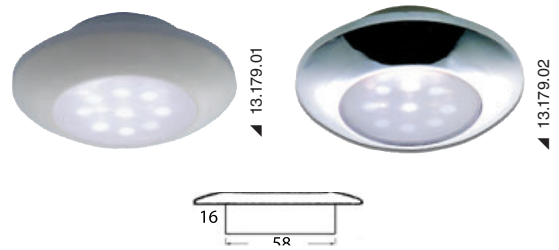

BATSYSTEM Saturn HD LED ceiling light

ABS body, satin polycarbonate lens. Protection grade IP21.


Code	Finishing	V	W	Mounting	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.833.11	White	12	3.5	Recessless	Yes, toggle switch	210	3000	120°	42	☐ white
13.833.12	Chromed	12	3.5	Recessless	Yes, toggle switch	210	3000	120°	42	☐ white

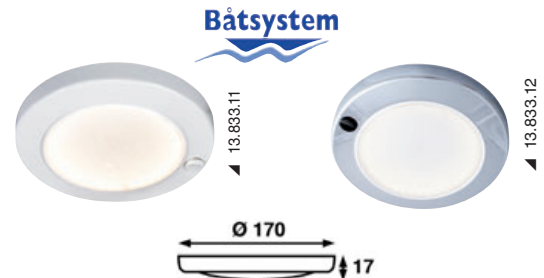

BATSYSTEM Comet LED spotlight for recess mounting

ABS body, frosted glass lens. Protection rating IP21

Code	Finishing	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.878.32	Chromed	8/30	2.4	no	150	3000	120°	12 LED SMD	☐ white
13.878.33	Chromed	8/30	2.4	Yes	150	3000	120°	12 LED SMD	☐ white

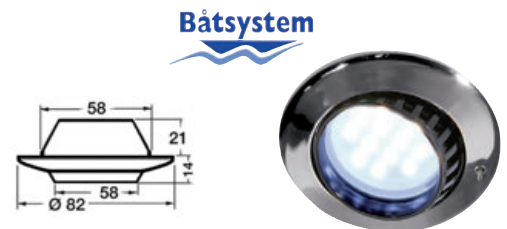**New** Sole recessed LED ceiling light

ABS body, technopolymer diffuser.

Code	Finish	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.877.80	White	8/28	2.2	no	155	3000	120°	12 LED SMD	☐ white
13.877.81	White	8/28	2.2	Yes	155	3000	120°	12 LED SMD	☐ white
13.877.82	Golden	8/28	2.2	no	155	3000	120°	12 LED SMD	☐ white
13.877.83	Golden	8/28	2.2	Yes	155	3000	120°	12 LED SMD	☐ white
13.877.84	Chromed	8/28	2.2	no	155	3000	120°	12 LED SMD	☐ white
13.877.85	Chromed	8/28	2.2	Yes	155	3000	120°	12 LED SMD	☐ white

**New** Outdoor LED ceiling light

ABS body, opal diffuser, with switch.

Code	Finish	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.831.32	White	12/24	2.5	Yes	270	3000	120°	16 LED SMD	☐ white



LED ceiling light, reduced overhang

IP66

FLUSH MOUNT

ABS body, satin-finish glass diffuser. Ultra-flat recessless version with touch switch and two light levels.

Code	Finishing	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
13.408.01	white + SS profile	12/24	3	Yes	168	3050-3800	120°	42 LED SMD	☐ white
13.408.02	Chromed	12/24	3	Yes	168	3050-3800	120°	42 LED SMD	☐ white

