



Montsarrat II LED ceiling light for recess mounting

White epoxy-powder coated aluminium body, stainless steel finish ring.

Code	Finishing	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.445.08	Mirror-polished	12/24	8	560	3000	50°	1 HD LED	☐ white

OSCULATI




Asterope halogen ceiling light for recess mounting

IP40

Glass lens, dichroic parabola. Fixing system with internal springs.

Code	Finishing	V	W	Bulb	Spare bulb	Light colour
13.434.01	Mirror-polished	12	20	G4	14.453.01; 14.100.24	☐ white

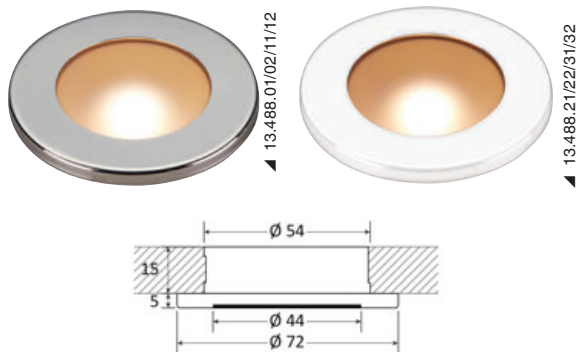

Polis dimmable reduced-depth recessed LED light

IP66

Polycarbonate housing with ring. Satin diffuser. Single central LED. Screw fixing.


Type of light:

13.488.01/02 with fixed or dimmable light. See the table to choose the ideal switch.

13.488.11/12 with dimmable light, (ON/OFF + dimmer) touch function included in the diffuser.

Type	Recommended switch types	Recommended switch models	Dimmable
A	ON/OFF	Any	no
A	Touch dimmer	14.482.00	Yes
B	ON/OFF	Any	no
B	Kurzzeitschalter	14.215.05/06.13/14 or similar	Yes

Ring		Type	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
☒ Polished stainless steel	☐ Polished white technopolymer									
13.488.01	13.488.21 New	A	12/24	2	no	170	3000	80°	1	☐ white
13.488.02	13.488.22 New	B	12/24	2	no	170 + 40	3000	80°	1	☒ White + red night
13.488.11	13.488.31 New	-	12/24	2	Yes, dimmable touch switch	170	3000	80°	1	☐ white
13.488.12	13.488.32 New	-	12/24	2	Yes, dimmable touch switch	170 + 40	3000	80°	1	☒ White + red night

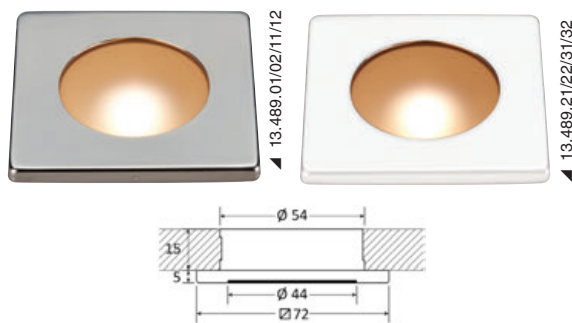

Propus dimmable reduced-depth recessed LED light

IP66

Polycarbonate housing with ring. Satin diffuser. Single central LED. Screw fixing.

13.489.01/02 with fixed or dimmable light. See the table to choose the ideal switch.

13.489.11/12 with dimmable light, (ON/OFF + dimmer) touch function included in the glass.

Type	Recommended switch types	Recommended switch models	Dimmable
A	ON/OFF	Any	no
A	Touch dimmer	14.482.00	Yes
B	ON/OFF	Any	no
B	Kurzzeitschalter	14.215.05/06.13/14 or similar	Yes

Ring		Type	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
☒ Polished stainless steel	☐ Polished white technopolymer									
13.489.01	13.489.21 New	A	12/24	2	no	170	3000	80°	1	☐ white
13.489.02	13.489.22 New	B	12/24	2	no	170 + 40	3000	80°	1	☒ White + red night
13.489.11	13.489.31 New	-	12/24	2	Yes, dimmable touch switch	170	3000	80°	1	☐ white
13.489.12	13.489.32 New	-	12/24	2	Yes, dimmable touch switch	170 + 40	3000	80°	1	☒ White + red night