


Dimmable Bos recessed LED light with reduced depth**IP66**

Polycarbonate housing with ring. Satin diffuser. Single central LED. Screw fixing.
 13.490.01/02 with fixed or dimmable light. See the table to choose the ideal switch.
 13.490.11/12 with dimmable light, (ON/OFF + dimmer) touch function included in the glass.

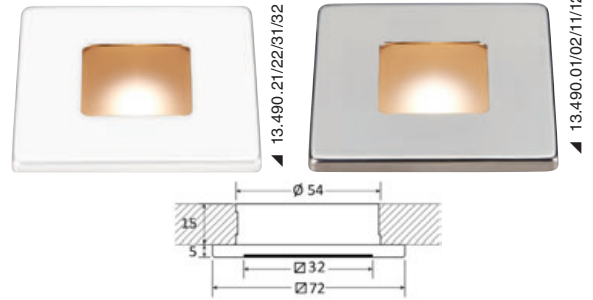

Type	Recommended switch types	Recommended switch models	Dimmable
A	ON/OFF	Any	no
A	Touch dimmer	14.482.00	Yes
B	ON/OFF	Any	no
B	Kurzzeitschalter	14.215.05/06.13/14; 14.482.01 or similar	Yes

Ring		Type	V	W	Switch	lumen	K	LED beam angle	No of LEDs	Light colour
Polished stainless steel	Polished white technopolymer									
13.490.01	13.490.21 New	A	12/24	2	no	170	3000	80°	1	<input type="checkbox"/> white
13.490.02	13.490.22 New	B	12/24	2	no	170 + 40	3000	80°	1	<input checked="" type="checkbox"/> White + red night
13.490.11	13.490.31 New	-	12/24	2	Yes, dimmable touch switch	170	3000	80°	1	<input type="checkbox"/> white
13.490.12	13.490.32 New	-	12/24	2	Yes, dimmable touch switch	170 + 40	3000	80°	1	<input checked="" type="checkbox"/> White + red night

Merope halogen spotlight for recess mounting**IP30**

Glass lens, dichroic parabola. Fixing system with internal springs.

Code	Finishing	V	W	Bulb	Spare bulb	Light colour
13.436.01	Mirror-polished	12	20	G4	14.454.12; 14.454.24	<input type="checkbox"/> white

**Syntesis LED ceiling light for recess mounting****IP65**

Aluminium body, stainless steel bezel. Fixing system with screws hidden by the front panel.

Code	Finishing	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.449.01	Mirror-polished	12/24	3	70	2900-3200	94°	1	<input type="checkbox"/> white

**Procion LED ceiling light, recessless version****IP65****FLUSH MOUNT**

Stainless steel body. Fixing via screws hidden by the front panel. Complete with 2 front lenses of different transparency.

Code	Finishing	V	W	Switch	lumen	Ø mm	K	LED beam angle	No of LEDs	Light colour
13.441.11	Mirror-polished	12/24	1.2	no	110 (clear diffuser) / 80 (white diffuser)	65	3000	90°	6	<input type="checkbox"/> white
13.441.12	Mirror-polished	12/24	1.2	Yes	110 (clear diffuser) / 80 (white diffuser)	65	3000	90°	6	<input type="checkbox"/> white
13.442.11	Mirror-polished	12/24	2.4	no	215 (clear diffuser) / 160 (white diffuser)	86	3000	90°	12	<input type="checkbox"/> white
13.442.12	Mirror-polished	12/24	2.4	Yes	215 (clear diffuser) / 160 (white diffuser)	86	3000	90°	12	<input type="checkbox"/> white
13.442.14	Nickel satin-finish	12/24	2.4	Yes	215 (clear diffuser) / 160 (white diffuser)	86	3000	90°	12	<input type="checkbox"/> white
13.442.25	Golden	12/24	2.4	no	215 (clear diffuser) / 160 (white diffuser)	86	3000	90°	12	<input type="checkbox"/> white
13.442.26	Golden	12/24	2.4	Yes	215 (clear diffuser) / 160 (white diffuser)	86	3000	90°	12	<input type="checkbox"/> white

**Procion (day/night) LED ceiling light, recessless version****IP65****FLUSH MOUNT**

Stainless steel body. Operated via the central button: first click = white light; second click = coloured light. Fixing via screws hidden by the front panel.

Code	Finishing	V	W	lumen	K	LED beam angle	No of LEDs	Light colour
13.442.15	Mirror-polished	12/24	2.4/1.2	143 (white); 29 (coloured)	3000	90°/105°	8 white; 4 blue	<input type="checkbox"/> White+blue
13.442.16	Mirror-polished	12/24	2.4/1.2	143 (white); 29 (coloured)	3000	90°/105°	8 white; 4 red	<input type="checkbox"/> White+red

