

OSCULATI**New****Aluminium LED ceiling lights****ALUMINIUM****WATERPROOF**

Slim LED ceiling lights with aluminium frame, ideal for indoor and outdoor environments.



Code	V	W	lumen	K	lmm
13.192.50	12/24	5.5	650	5700	182x40x18
13.192.51	12/24	11.5	1200	5700	310x40x18
13.192.52	12/24	17	1700	5700	438x40x18

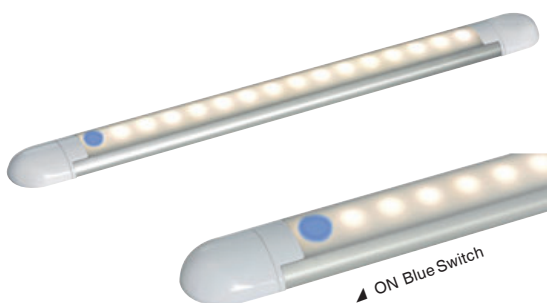
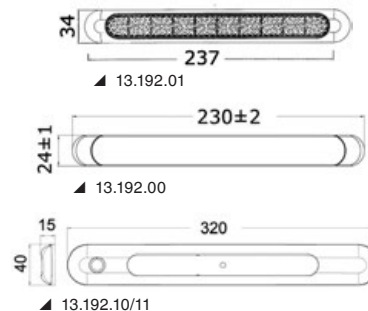
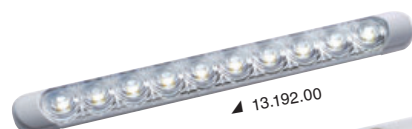
Plastic light strips**Cobo spotlight**

Genuine Cobo white polycarbon ceiling light with switch. Fastoon bulbs not included.

Code	Finish	Switch	lmm	Optional bulb	OPTIONAL LED
13.523.01	Poly-carbonate	Yes	120x36x27 h	14.300.00; 14.300.01	14.300.32
13.523.02	Poly-carbonate	Yes	165x38x28 h	14.300.00; 14.300.01	14.300.32


Watertight LED surface light**OSCULATI****IP66**LED SMD-HD high-efficiency light source. **Flat base** version, ideal for engine compartments, bathrooms, kitchens, under boom on sailing boats, etc.

Code	Finishing	V	W	Switch	lumen	K	LED beam angle	lmm	LED
13.192.00	White	12	3.4	no	360	4000	70°	230x24x11 h	10 SMD-HD
13.192.01	Polished AISI316 SS	12	6	no	450	4000	30°	238x34x8.4 h	10 SMD-HD
13.192.10	White	12	5.4	Yes	450	4000	50°	320x40x15 h	10 SMD-HD
13.192.11	Chromed	12	5.4	Yes	450	4000	50°	320x40x15 h	10 SMD-HD

**Linear overhead LED light**

14 LED SMD-HD high-efficiency light source. Light alloy base with polycarbonate opal lens. Round switches with built-in blue/red LED.

Code	Finishing	V	W	Switch	lumen	K	LED beam angle	No of LEDs	lmm
13.192.40	White	12	5.2	Yes	228	3000	120°	14	345x33x12 (H)

**Labcraft**
DESIGN LED LIGHTING**LABCRAFT Astro LED strip light****LED**

24 HD Superflux LEDs are used which are embedded in a watertight clear resin structure. Light performance at 1-m distance equal to a 10-watt halogen bulb but with 1/5 consumption.

IP66

Code	Finishing	V	W	Current draw A	lumen	K	LED beam angle	No of LEDs	lmm
13.198.01	Grey technopolymer	12	3.7	0.18	320	6100 -6900	115°	24	592x43x30 h
13.198.02	Grey technopolymer	24	3.7	0.9	320	6100 -6900	115°	24	592x43x30 h

