

### Hot-galvanized Genovese chain

Elongated link version. Ideal for fixed and dock mooring (no winch).

| Length when stretched |               | Ø mm | Kg/m  | Working load kg | Breaking load kg |
|-----------------------|---------------|------|-------|-----------------|------------------|
| 50 m                  | 100 m         |      |       |                 |                  |
| 01.372.06-050         | 01.372.06-100 | 6    | 0.73  | 340             | 1360             |
| 01.372.07-050         | 01.372.07-100 | 7    | 1.1   | 460             | 1840             |
| 01.372.08-050         | 01.372.08-100 | 8    | 1.33  | 600             | 2400             |
| 01.372.10-050         | 01.372.10-100 | 10   | 2.075 | 940             | 3760             |
| 01.372.12-050         | 01.372.12-100 | 12   | 3     | 1360            | 5440             |
| 01.372.16-050         | New           | 16   | 5.3   | 3050            | 9500             |
| 01.372.20-050         | New           | 20   | 8     | 4750            | 16500            |
| 01.372.24-050         | New           | 24   | 11    | 7800            | 20800            |



### AISI 316 stainless steel Genovese chain

Elongated link version. Ideal for fixed and dock mooring (no winch).


| Length when stretched 50 m |  | Ø mm | Kg/m  | Working load kg | Breaking load kg |
|----------------------------|--|------|-------|-----------------|------------------|
| 01.374.03-050              |  | 3    | 0.165 | 110             | 450              |
| 01.374.04-050              |  | 4    | 0.3   | 200             | 800              |
| 01.374.05-050              |  | 5    | 0.5   | 310             | 1250             |
| 01.374.06-050              |  | 6    | 0.73  | 450             | 1800             |
| 01.374.08-050              |  | 8    | 1.3   | 800             | 3200             |
| 01.374.10-050              |  | 10   | 2.05  | 1250            | 5000             |



### Shackle with Allen-head recessed pin

Made of AISI 316 stainless steel, it enables the anchor to fit into the bow rollers without getting tangled.


| Code      | A mm | B mm | D mm | L1 mm | ORDER BY BOX |
|-----------|------|------|------|-------|--------------|
| 01.080.05 | 5    | 10   | 10   | 20    | 10           |
| 01.080.06 | 6    | 12   | 12   | 24    | 10           |
| 01.080.08 | 8    | 16   | 16   | 32    | 10           |
| 01.080.10 | 10   | 20   | 20   | 40    | 5            |
| 01.080.12 | 12   | 24   | 24   | 48    | -            |
| 01.080.14 | 14   | 28   | 28   | 63    | -            |
| 01.080.16 | 16   | 32   | 32   | 64    | -            |

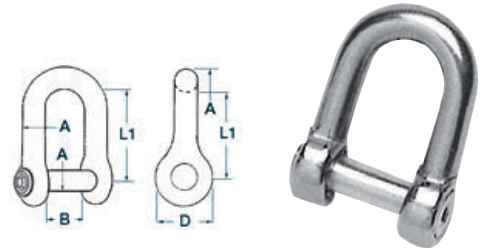

### Bow shackle with Allen-head recessed pin

Made of AISI 316 stainless steel, it enables the anchor to fit into rollers without getting tangled.

| Code      | Ø mm | A mm | B mm |
|-----------|------|------|------|
| 01.081.06 | 6    | 12   | 27   |
| 01.081.08 | 8    | 16   | 37   |
| 01.081.10 | 10   | 20   | 46   |
| 01.081.12 | 12   | 25   | 55   |
| 01.081.14 | 14   | 28   | 60   |



### Anchor Rod Set: line, chain, connector and anchor

The easy solution for anchor lines to suit a wide range of installations and requirements.

These packages easily adapt to most situations.

Each package is delivered "ready to use" in a special packaging.

The line is already weighted with a suitable chain link.

| Code      | Anchor type | Anchor kg | chain Ø mm | Chain length mm | Chain link | Line length | Cable Ø mm | Anchorchain connector mm | Anchorchainconnector | Hulls with winch | Recommended for hulls up to (approx.) m |
|-----------|-------------|-----------|------------|-----------------|------------|-------------|------------|--------------------------|----------------------|------------------|-----------------------------------------|
| 01.700.01 | Umbrella    | 4         | 6          | 5               | Genovese   | 35          | 10         | 8                        | Galvanized shackle   | no               | 4-6                                     |
| 01.700.02 | Umbrella    | 6         | 6          | 10              | Genovese   | 35          | 10         | 8                        | Galvanized shackle   | no               | 5-7                                     |
| 01.700.03 | Umbrella    | 8         | 7          | 10              | Genovese   | 35          | 12         | 10                       | Galvanized shackle   | no               | 6-8                                     |
| 01.710.01 | Hall        | 4.2       | 6          | 5               | Genovese   | 35          | 10         | 8                        | Galvanized shackle   | no               | 4-6                                     |
| 01.710.02 | Hall        | 6.2       | 6          | 10              | Genovese   | 35          | 10         | 8                        | Galvanized shackle   | no               | 5-7                                     |
| 01.710.03 | Hall        | 8.8       | 7          | 10              | Genovese   | 35          | 12         | 10                       | Galvanized shackle   | no               | 6-8                                     |
| 01.800.01 | Trefoil     | 7.5       | 6          | 25              | Sized      | 35          | 12         | 8                        | Swivelling joint     | Yes              | 5-7                                     |
| 01.800.02 | Trefoil     | 10        | 6          | 25              | Sized      | 35          | 12         | 8                        | Swivelling joint     | Yes              | 6-8                                     |
| 01.800.03 | Trefoil     | 13        | 8          | 25              | Sized      | 35          | 14         | 8                        | Swivelling joint     | Yes              | 7-10                                    |

