

### Night Eye and Night Eye LED high-beam light with pulpit coupling

#### Features:




- **ABS** with **anodized aluminium** bracket and **stainless steel** base.
- WAGNER optical bulb.
- Full 360° rotation and elevation joint, frictioning.
- Detachable light with 2-m extension cable.
- Watertight switch, fitted with rubber cover, integrated into the rear dome.
- Equipped with watertight plug for recess or flat mounting.

#### Features:

- Weather resistant.
- Vacuum-sealed optic bulb, humidity- and salt-resistant.
- Great power.
- Light weight, low cost.

**OSCULATI**



Code	Version	Beam type	V	W	lumen	Beam		For pipes mm	Beam dimensions		Spare bulb
						FLOOD m	SPOT m		H mm	Ø mm	
13.239.00	Halogen	SPOT- FLOOD	12	100+100	-	100	400	22/25	250	215	13.116.00 (12 V)
13.241.02	LED	SPOT- FLOOD	12/24	24	2600	100	600	22/25	250	215	13.241.03

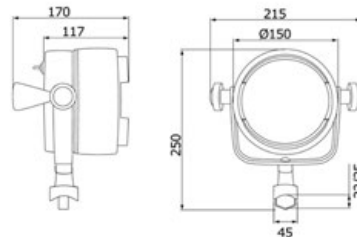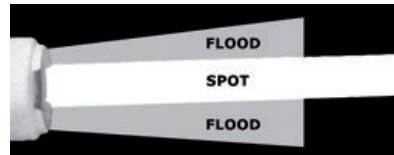

### Fixing support for lights

Made of stainless steel and aluminium. The light can be removed thanks to the fixing system with plastic-grip knob.

Code	Type	Suitable for lights	Spare base for
13.239.80	For hose 22/25 Ø mm	13.321.01; 13.321.03; 13.321.04; 13.321.05	13.239.00
13.240.80	flat mounting	13.321.01; 13.321.03; 13.321.04; 13.321.05	13.240.00

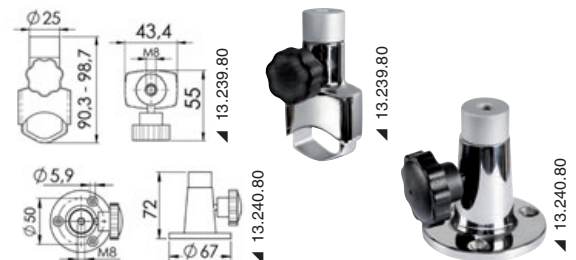

### Moonlight LED high-beam light


#### LED

Adjustable LED high-beam light with mirror-polished stainless steel swivelling handle and joint.

#### Features:

- Adjustable in height and 360° rotation.
- White PMA base plate for flat mounting.
- two knobs adjust the joint and lock it to the base plate.
- watertight ON-OFF switch;
- spiral cord extensible up to 2 m and fitted with lighter plug.

Code	Body	V	W	lumen	K	LED beam angle	No of LEDs	↔  mm
13.210.00	White ABS + SS inox	12/24	36	3000	6000	50°	12	148x254x122


**OSCULATI**


### Night Eye Manual light

With **waterproof** halogen **BLUE EYE** bulb of 5 3/4 inches, original **STANLEY** with **double filament** and maximum range of 600 m. Produces short wide beam or deep narrow cone light. Operated via handle under deck or under Roll-bar, with rotation of 330° and up-down ±28°. Applicable on thicknesses from 5 mm to 25 mm. For replacement bulbs see articles: 13.230.12/13.

Code	Body	V	W	Height mm	Length mm	Ø mm	Base Ø mm
13.005.12	White ABS	12	100+100	220	220	160	120
13.005.24	White ABS	24	80+60	220	220	160	120

