




### SANSHIN swivelling light with electric control

IP56

Fitted with two 55W **halogen** bulbs. **Light alloy** white body, remote control, clamp flasher and lantern variable rotation speed. Max capacity 1200m, dimensions 200x232mm.

Code	V	Current draw A	CD candles*	Spare bulb	Second station panels	Spare panels	kg
13.343.12	12	10	200.000	13.343.01	13.344.12	13.343.22	6
13.343.24	24	6	160.000	13.343.02	13.344.24	13.343.34	6

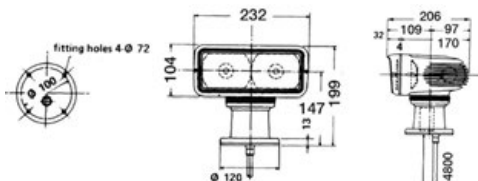


### GUEST remote-controlled light

With "Sealed Beam" bulb **waterproof dual light**: short and wide or deep with narrow beam. 450° horizontal rotation and 70° vertical rotation. Complete with control panel. Base in stainless steel 316 and head in stainless steel 304.

Code	Model	V	Spark plugs	Base mm	↔  mm	Spare bulb
13.346.12	5	12	72.000/30.000	140x89	241h x 115Ø x 177 depth	13.346.13

## Spot light for cockpits, decks and cross-tree

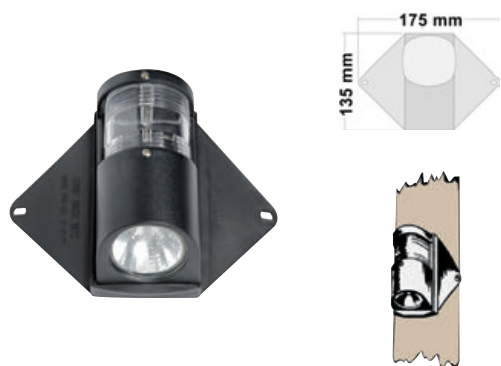

### UTILITY navigation light and deck light for hulls up to 12 m

225° navigation light Art. 11.415.03 compliant with **IMCO and RINA** standards. Paired with special 35 W 12 V **halogen spotlight with dichroic front glass** (replacement bulb 13.258.57). Made entirely of black polycarbonate, perfectly watertight. Special flexible system of side straps allowing use on masts of **any size**. Mount the **RINA approved** light 11.415.03 (replacement bulb 14.300.00).

Code	Version	Body	V	W	W equivalent	↔  mm	Spare bulb
13.243.86	Halogen dichroic spot light	Black polycarbonate	12	35	-	175x135	14.258.57 12 V
13.243.87	HD LED	Black polycarbonate	12	4	48	175x135	14.258.56 LED

### Navigation and deck LED light for boat up to 20 m


LED



CE

225° LED navigation lights 11.060.03 + deck LED light. Technopolymer body with flexible wings that match any kind of mast. Certificates EN60945 - COLREG 1972 + USCG + ABYC A-16.

Code	Light	Deck light	Body	V
13.243.88	11.060.03	4x1W HD LEDs	Black technopolymer	9-33
13.243.89	11.060.03	4x1W HD LEDs	White technopolymer	9-33



▲ 13.243.88



▲ 13.243.89