

Deck light for mast

Fitted with flexible flaps adaptable to any type of mast. Halogen bulb included.

Code	Body	V	W	Spare halogen lamp		←→ mm
				12 V	24 V	
13.343.87	<input type="checkbox"/> White nylon	12	20	14.453.01	14.100.24	130x72x65

**Crosstree light made of stainless steel, fixed model**

Stainless steel body fitted with watertight GE halogen bulb.

Code	Base	V	←→ mm		Spare bulb	
			G.E. watertight bulb Ø	Base	12V	24V
13.243.90	Fixed	12	110	Fixed	14.249.07; 14.249.11	-
13.243.91	Fixed	24	110	Fixed	-	14.249.08
13.243.93	Articulated	24	110	Articulated	-	14.249.08



▲ 13.243.93



▲ 13.243.90/91

Sealed Beam watertight light with watertight halogen optic bulb

Ideal as mooring light or to be uses on the roll-bar of dinghies.

Code	Body	Articulated bracket in	V	W	←→ mm
13.309.04	<input type="checkbox"/> ABS white	Stainless steel	12	55	152x92x92
13.309.05	<input type="checkbox"/> ABS white	Stainless steel	12	55	177x121x99

**Roll-bar light, high-power vertically adjustable mode**


Fitted with dual filament watertight Sealed Beam.

Code	Body	V	lu-men	LED beam angle	Depth light + wide beam light	←→ mm	
						Overall dimensions	Base
13.310.12	<input type="checkbox"/> ABS white	12	287	60°	65 + 45 W	180x110x125 h	140x46

**Free-standing adjustable LED light**

Stainless steel articulated base with full rotation on both axes.

Code	Body	V	lu-men	K	LED beam angle	No of LEDs	LED colour	←→ mm	
								Overall dimensions	Base
13.270.61	<input type="checkbox"/> Polished anodized aluminum	12/24	1400	6000	60°	6x3 W	<input type="checkbox"/> white	154x53	154x53

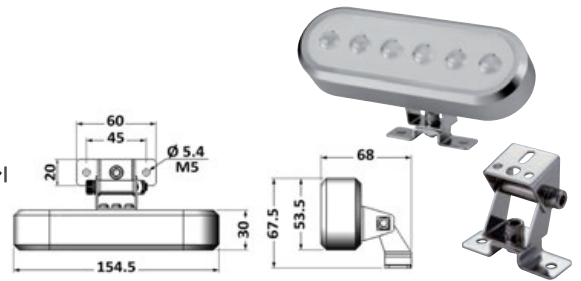**LED light with adjustable support**

LED **IP68** **AISI 317L**

Adjustable UV-resistant ASA support for flat, vertical or inclined mounting.

Support + spotlight	Support, only	Spotlight, only	W	lumen	K	LED beam angle	No of LEDs	LED colour	←→ base mm
13.270.52	13.270.52	13.270.52	16	500	6000	10°	2	<input type="checkbox"/> white	120x40
13.270.54	13.270.54	13.270.54	12	1000	6000	10°	4	<input type="checkbox"/> white	120x40
13.270.56	13.270.56	13.270.56	18	1500	6000	10°	6	<input type="checkbox"/> white	120x40



▲ 13.270.52



▲ 13.270.54




▲ 13.270.56

LED spotlight for gangplanks, upper sterns and fly bridges.

IP67

Anodized aluminium body coated in white epoxy resin. Installation with stainless steel screws and Duralac-type paste. Coverage area over 30 square meters.

Code	V	W	lumen	K	LED beam angle	No of LEDs	LED colour	←→ mm
13.269.01	12/24	12.5	>1560	5700-6500	30°	5	<input type="checkbox"/> white	230x63x36



Labcraft
DESIGN LED LIGHTING