




OSCULATI


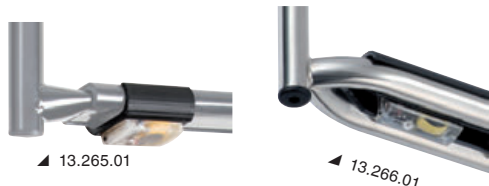


Underwater LED light for ladders

PATENT

Little interlocking light for telescopic ladders. Automatic switching when getting in touch with water. 100-h life sealed battery. Sold in 2-pc display package. Available for both Standard step ladders (38 mm) and for Extra-large step ladders (57 mm and up). Pressure mounting on the highest step, they take no room at all.

Code	Version	Light colour	Life h	Package pcs
13.265.01	Light for Standard 38-mm step ladder	blue	100	2
13.266.01	Light for Extra-large 57-mm double step ladder	blue	100	2

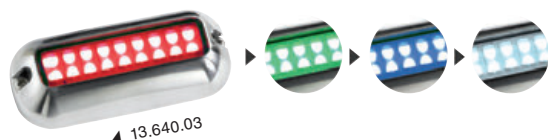

Underwater LED light


IP68

Mirror-polished AISI 316 stainless steel housing.

Attention: Due to the high temperature generated during operation, it cannot be used outside of water.

Code	V	W	No of LEDs	K	lumen	LED beam angle	LED colour
13.640.01	10/30	3.6	27	5700	343	108°	white
13.640.02	10/30	3.6	27	5700	74	108°	blue
13.640.03*	12	1.2	18	2800-3200	95/67/10/12**	120°	-RGBW

* Press repeatedly the ON-OFF switch to select the colour of the LED light (white / green / blue / red).
 ** Lumen white 95, green 67, blue 10, red 12




OSCULATI



Underwater LED light for hull/transom

IPX8

Underwater installation, only. Made of technopolymer and fitted with high-efficiency LED. A single 13-mm Ø bore is needed for through deck power cable.

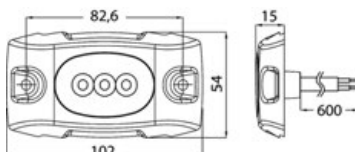

Code	Finishing	V	W	No of LEDs	K	lumen	LED beam angle	LED colour	lmm
13.276.01	Technopolymer	12/24	10	3	5700	998	30°	white	102x54x15
13.276.02	Technopolymer	12/24	10	3	-	142	30°	blue	102x54x15
13.276.10	Technopolymer + polished AISI316 SS body	12/24	10	3	5700	998	30°	white	102x54x15
13.276.12	Technopolymer + polished AISI316 SS body	12/24	10	3	-	142	30°	blue	102x54x15