

New**Retractable electric cable****IP44****AISI 316****AUTOMATIC ROLLABLE**

Innovative electrical cable dock system. Hull hidden installation.

Thanks to an automatic retractable dispenser the electrical cable is drawn from a box and directly connected to the dock pillar.

To stow the cable, just unlock the seal and wait for the retractor to automatically rewind the extracted cable.

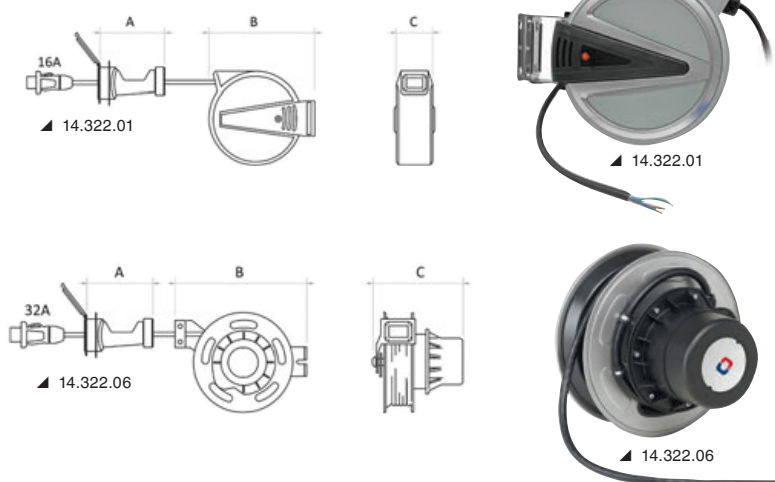
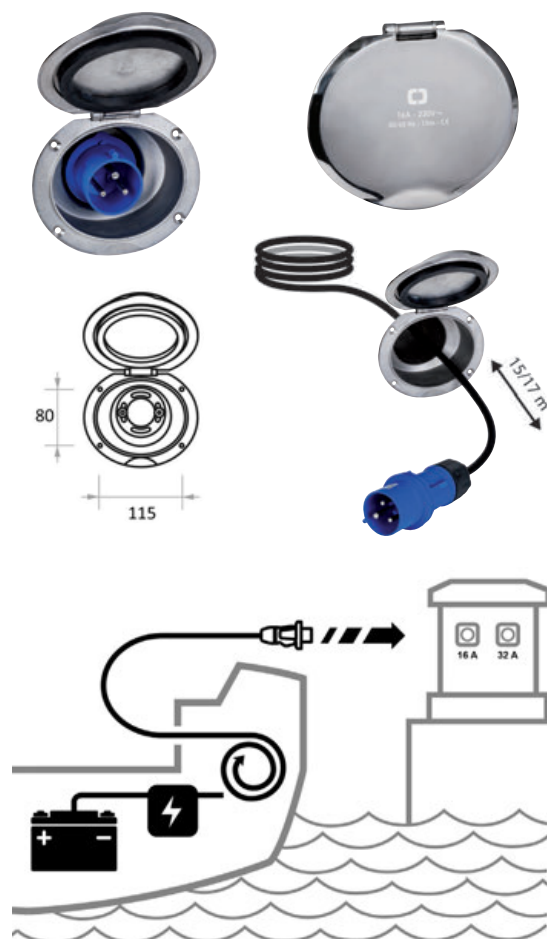
Once the cable is stowed away, the system disappears inside the hull into an elegant mirror-polished stainless steel box that ensures IP44 airtight seal.

The alignment between the winder and the bush can be oriented in any direction with a maximum recommended angle of 80°.

Available in two versions with different cable capacities of 16A and 32A.

Internal winder supplied with adjustable mounting brackets.

Code	Description	A	Cable length m	Cable cross-section mm ²	V	A mm	B mm	C mm
14.322.01	3P plug	16	15	3x2.5	230	220	400	150
14.322.06	3P plug	32	17	3x4	230	220	460	340

**OSCULATI****New****Dock cable with braid and Cruiser plug****16A****ROPE FEELING**

The electrical cable is sheathed in a special polyester cover for wear protection and nautical look. Equipped with a 16A Cruiser plug, boat side and a three-pole industrial plug, dock side.

Code	Length m	A	Ø outer cable mm	Cable cross-section mm ²	Dockside plug
14.416.60	10	16	12.4	2.5	14.335.01
14.416.61	15	16	12.4	2.5	14.335.01

**OSCULATI****Cruiser dock cable and plug****16A****IP67****IEC 60309-5**

Code	Length m	A	Ø outer cable mm	Cable cross-section mm ²	Dockside plug
14.416.10	10	16	11.2	2.5	no
14.416.15	15	16	11.2	2.5	no
14.416.20	10	16	11.2	2.5	14.335.01 (16A)
14.416.25	15	16	11.2	2.5	14.335.01 (16A)
14.432.10 New	10	32	14	3x4	no
14.432.15 New	15	32	14	3x4	no
14.432.20 New	10	32	14	3x4	14.335.02 (32 A)
14.432.25 New	15	32	14	3x4	14.335.02 (32 A)

OSCULATI