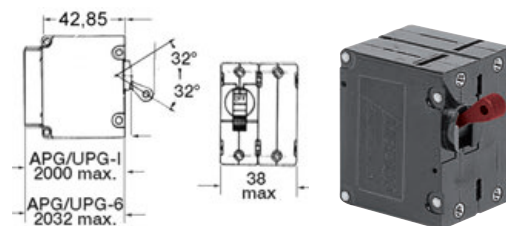


AIRPAX / SENSATA hydraulic/magnetic circuit breaker, 2 poles, AC

For 80V onboard applications.

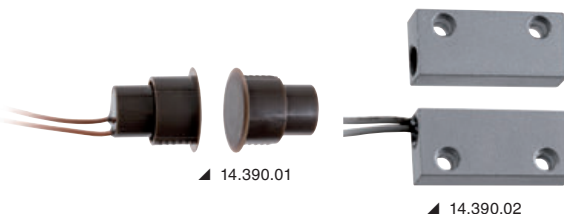
Code	Power supply	Capacity A	Black frontpanel in mm	Fixing with	Depth mm
14.734.05	DC MAX 80 V	5	19x51	2 screws	41
14.734.10	DC MAX 80 V	10	19x51	2 screws	41
14.734.20	DC MAX 80 V	20	19x51	2 screws	41
14.734.25	DC MAX 80 V	25	19x51	2 screws	41
14.734.30	DC MAX 80 V	30	19x51	2 screws	41

**Circuit breaker**

Easy-to-install safety magnetic circuit breaker. It stops the current flow when the two parts come into contact. It opens the circuit at a 15-mm distance.

Ideal for wet bars with electric cooking ranges, hydraulic / electric gangplanks, end-of-stroke devices for electric tables.

Code	Mounting	Fixing	Version	Material	mm	A
14.390.01	recess	Sticker	Round	ABS	Ø19 x 23	0.5
14.390.02	Outside	screws	Rectangular	Zinc alloy	31x14x7.5	0.5

**Automatic safety shutoffs****Kill cords**

With pull-out lace and snap hook.

Code	For engines
14.203.01	Tohatsu
14.203.02	Johnson / Evinrude 3-arm fork version (until 1995)
14.203.03	Johnson / Evinrude standard fork version (after 1995)
14.203.04	OMC/Honda (old version)
14.203.05	Yamaha (up to 2014; 9-mm Ø)
14.203.09	Yamaha (since 2015; 13.9-mm Ø)
14.203.06	Mercury/Mariner
14.203.07	Suzuki/Johnson 4 strokes
14.203.08	New Honda

**Safety key kit for outboard engines**


Fitted with extensible lace, snap-hook and 11 keys.

Code	Engines
14.203.10	Johnson / Evinrude (old and new model) / Yamaha / Honda (old and new model) / Mercury / Suzuki (old and new model) / Tohatsu (2 and 4 strokes), Kawasaki

**Ignition safety cut-off device (complying with regulations)**

Made of chromed brass, fitted with front and back watertight cover.

Code	Use
14.919.03	Take off red cap to close circuit
14.919.04	take off grey cap to open circuit

**Ignition safety cut-off device (complying with regulations)**

Fitted with slip-off clip system, **universal** size, it can **open and close** the circuit depending on the terminals that are connected.

Code	Description	Spare key
14.204.92	Fitted with safety key and float	14.204.94
14.204.96	Complete disconnect with safety key	14.204.98 also adaptable to Selva, Johnson, Evinrude, Honda

