


Ignition keys and accessories for instrument panel



Watertight ignition key IP65


Fitted with removable key, which **activates selected systems** such as the bilge pump, water level or petrol level without powering the whole boat. Watertight seal by means of a cap on the key hole. The additional function **cannot be activated by error** as the key must be turned to the left and pushed in. Universal model for petrol or diesel engines, fitted with **nylon** body, **stainless steel**, **nylon** and **rubber** cap.

Code	Positions	A	Only watertight key cap
14.135.00	0 (removable key) + 1 (contact) 2 (start with spring return) + Additional function to the left of 0	30	14.135.01



Watertight cap for key




Code	Only watertight key cap	Can be applied to keys
14.135.01	14.135.00	14.918.31/33 and all Ø 22.5 mm neck keys

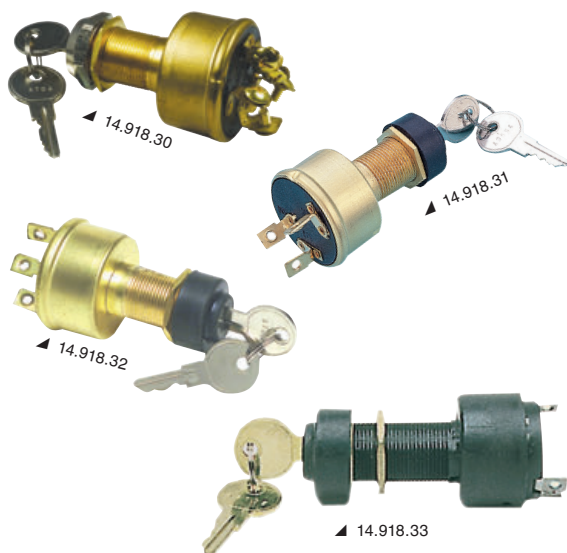

Watertight ignition key


Watertight due to its **rubber** key-protection cap.

Code	Version	Rubber cap	A	Rear contacts	Positions
14.918.30	brass	no	15	5	3 (see schematic C)
14.918.31	brass	Yes	15	3	3 (see layout A)
14.918.32	brass	Yes	15	4	4 (see layout B)
14.918.33	Black Nylon	Yes	10	3	3 (see layout A)



Ignition solenoid

High-quality material, sturdy and efficient.

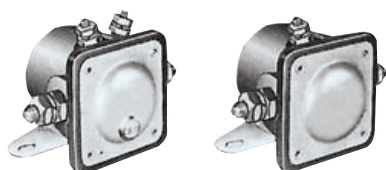

Code	Body	V	Terminal insulated	Ø mm
14.918.34	bakelite	12	1	54
14.918.35	bakelite	12	2	54

LED light for instrument panel

Made of **watertight chromed brass**.



Code	V	Colour	Threaded body Ø mm
14.185.01	12/24	red	18
14.185.02	12/24	green	18

Battery boxes

OSCULATI



Battery box, watertight with ventilation

Made in accordance with ISO 10133 standards, equipped with mounting system.

Code	Manufactured in	For batteries max A·h	↔ mm		 PACKAGE
			internal	external	
14.545.00	Grey/blue moplen	100	360x185x220 h	420x245x270 h	6