


Heavy Duty Bus Bar Electrical Terminals

Made of nylon/fibreglass. The cables can feed through all four sides.


Code	V	Shunt terminals mm	Power terminals mm	Base mm	Current draw A
14.209.29	12/24	-	4x10 separate	138x69	200
14.209.30	12/24	-	4x10	138x69	300
14.209.31	12/24	6x5	2x10	138x69	300
14.209.32	12/24	12x4	4x6	138x69	100

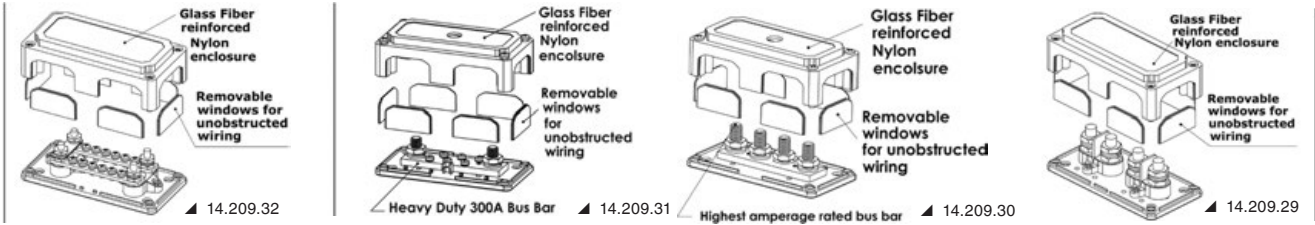

ANL fuse holder, high performance

Made of nylon/fibreglass. Fitted with LED indicator for fuse state (it lights up when the fuse burns out) and upper slot for visual check. Matching fuses 14.100.xx.

Code	Description	A max	Ø contacts mm	<=> mm
14.100.40	Single ANL fuse holder	300	10	138x69x44.5 single
14.100.39*	Double ANL fuse holder	750	10	138x69x44.5 single

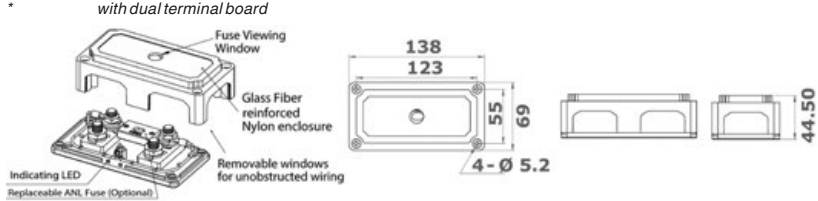

Insulating covers made of transparent plastic for Bus Bar

Code	For
14.208.10	14.207.10
14.208.20	14.207.12
14.208.30	14.209.10/20



Fuses and fuse holders

36 assorted blade fuses

5 A to 30 A.

Code	ORDER BY BOX
14.004.00	6 x 5 A blade fuses; 9 x 10 A blade fuses; 9 x 15 A blade fuses; 6 x 20 A blade fuses; 6 x 30 A blade fuses.



Assorted glass fuses

From 1A to 20A.

Code	ORDER BY BOX
14.153.00	24 fuses 5x20 mm (6 x 1A; 6 x 2A; 6 x 5A; 6 x 10A), 24 fuses 6.3x32 mm (6 x 5A; 6 x 10A; 6 x 15A; 6 x 20A).



Glass fuses for instruments

Rapid-action glass body. Silver-plated copper contacts. Rated voltage: up to max 250V.

Code	<=> mm	A	ORDER BY BOX	Code	<=> mm	A	ORDER BY BOX
14.152.05	6.3x32	5	100	14.151.01	5x20	1	100
14.152.10	6.3x32	10	100	14.151.02	5x20	2	100
14.152.16	6.3x32	15	100	14.151.05	5x20	5	100
14.152.20	6.3x32	20	100	14.151.10	5x20	10	100



Standard blade fuses

Assorted colours depending on their amperage. Rated voltage: max 32V.

Code	A	ORDER BY BOX	Code	A	ORDER BY BOX
14.004.10	5	100	14.004.50	20	100
14.004.30	10	100	14.004.70	30	100
14.004.40	15	100			

