


Pre-insulated eyes

Code	Cable mm ²	Opening mm	 ORDER BY BOX
14.186.61	1/2.5	4.3	100
14.186.62	1/2.5	5.3	100
14.186.71	2.5/6	5.3	100
14.186.72	2.5/6	6.4	100



Faston pre-insulated blade connectors (4.7 mm, 6.3 mm, 9.5 mm)

Code	Type	Cable mm ²	Opening mm	 ORDER BY BOX
14.185.45	Female	1/2.5	4.7	100
14.185.46	Male	1/2.5	4.7	100
14.185.50	Female	1/2.5	6.3	100
14.185.60	Male	1/2.5	6.3	100
14.186.11	Female	2.5/6	6.3	100
14.186.20	Male	2.5/6	6.3	100
14.186.30	Female	2.5/6	9.5	50



▲ 14.185.50/45




▲ 14.185.60/46; 14.186.20




▲ 14.186.30/11

Fully pre-insulated 4.7- and 6.3-mm Faston terminal

Code	Type	Cable mm ²	Opening mm	 ORDER BY BOX
14.185.54	Female	1/2.5	4.7	100
14.185.55	Female	1/2.5	6.3	100
14.186.06	Female	2.5/6	6.3	100
14.185.65	Male	1/2.5	6.3	100
14.186.24	Male	2.5/6	6.3	100




▲ 14.185.54/55; 14.186.06




▲ 14.185.65; 14.186.24

Faston terminals, pre-insulated watertight heat-shrinkable 6.3-mm size

Code	Type	A mm	B mm	C mm	D mm	Cable mm ²	 ORDER BY BOX
14.798.01	Female	6.35	0.8	28	4.9	1.2/2.5	100
14.798.02	Male	6.35	0.8	28	4.9	1.2/2.5	100




▲ 14.798.02



▲ 14.798.01


Piggy Back female faston, pre-insulated 6.3-mm size

Code	Cable mm ²	Compatible Faston	 ORDER BY BOX
14.186.26	1/2.5	14.185.50; 14.185.60; 14.185.55	50




Cylindrical terminals, pre-insulated

Code	Type	Cable mm ²	Ø mm E	Ø mm i	 ORDER BY BOX
14.186.43	Male	1/2.5	4	-	100
14.186.44	Female	1/2.5	4	-	100
14.186.47	Male	2.5/6	5	3.86	100
14.186.48	Female	2.5/6	5	4.85	50

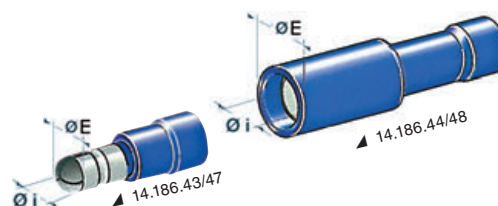


▲ 14.186.43/47



▲ 14.186.44/48

Male plugs + female connections, pre-insulated


Code	Type	Cable mm ²	 ORDER BY BOX
14.186.81	Female	1/2.5	100
14.186.83	Female	2.5/6	50
14.186.91	Male	1/2.5	100
14.186.92	Male	2.5/6	100




▲ 14.186.91



▲ 14.186.81



▲ 14.186.92



▲ 14.186.83