

Watertight connectors for cables up to 10 mm²



Watertight connectors

A complete connector is formed by: connector + 2 male fastons 14.231.20/40 + 2 female fastons 14.231.0/30 + 4 dowels with gasket of the appropriate section 14.232.01/02.

Code	Version	For cables mm ²
14.231.10	Faston female	4/6
14.231.20	Faston male	4/6
14.231.30	Faston female	8/10
14.231.40	Faston male	8/10
14.232.01	Plug with gasket	4/6
14.232.02	Plug with gasket	8/10

BULGIN BUCCANEER plugs and sockets

RINA type-approved, managed polarity, 100% watertight, IP 68 protection degree. Fibreglass-reinforced nylon body, nickel-plated brass contacts, watertight screw-in cap, type-approved in compliance with NATO military standards. Operating temperature range - 20° + 70°.

Male contact plug

Flying plug to pair with a female contact socket.

Code	Poles	Capacity
14.350.02	2	10 A
14.350.03	3	10 A
14.350.09	9	5 A



External socket, female contacts

Includes watertight cover.


Code	Poles	Match to
14.360.02	2	14.350.02
14.360.03	3	14.350.03
14.360.09	9	14.350.09



Built-in socket, female contacts

Includes watertight cover.

Code	Poles	Match to
14.370.02	2	14.350.02
14.370.03	3	14.350.03
14.370.09	9	14.350.09

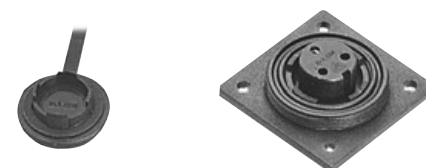

Watertight deck plugs and sockets

Watertight plug

Fine built, maximum reliability, **made of chromed brass**.

Code	Socket + plug	Max A	Base Ø mm
14.187.02	2 poles	10	40
14.187.03	3 poles	10	40
14.187.04	4 poles	10	40
14.387.02	2 poles	20	46
14.387.03	3 poles	20	46
14.387.04	4 poles	20	46



Watertight plug made of polycarbonate and fitted with brass contacts

IP65

Fine built, maximum reliability.

Code	Socket + plug	Max A	Base Ø mm
14.470.02	2 poles	3 A	40
14.470.03	3 poles	3 A	40
14.470.04	4 poles	3 A	40
14.471.02	2 poles	5 A	49
14.471.03	3 poles	5 A	49
14.471.04	4 poles	5 A	49



Culversterns flying plug

Watertight plug made of rubber and fitted with brass contacts.

Code	Poles	Max A	Version
14.188.02	2	10	Male + female
14.188.03	3	10	Male + female
14.188.04	4	10	Male + female

