

Autoclaves

MARCO



MARCO high-pressure washdown kit

Ideal for washdown operations with fresh and salt water.

Includes:

- self-priming high-pressure electric pump with electronic control, equipped with helical PEEK gears;
- 15 m of extendable hose;
- snap-in spray nozzle, jet lock, check valve and trigger to adjust the flow.

Code	Initials	V	Max flow rate/l/min	Current draw A	Pressure bar	Fuse	←→ mm
16.082.01	DP12/E	12/24	15	24	6	25	242x212 x113

MARCO

MARCO electronically-operated automatic fresh water pump

INTEGRATED FLANGE

Self-priming with helical PEEK gears.

Pressure, current and voltage constant control.


Automatic stop when running out of liquid.

The engine progressively increases its revolutions to reach the required flow and ensure long working cycles, lower noisiness and consumption optimization.

The pump is fitted with circuit breaker and overvoltage protection device.

A protection system engages after 90 seconds of dry running.

Code	Initials	V	Max flow rate/l/min	Current draw A		Pressure bar	Control panel	kg
				12V	24V			
16.081.02	UP2/E	12/24	12	3/6	1.5/3	2	-	1.4
16.081.03	UP3/E	12/24	15	4/8	2/4	2.5	16.081.20 OPTIONAL	2.3
16.081.06	UP6/E	12/24	26	5/15	2.5/7.5	2.5	16.081.20 OPTIONAL	3.7
16.081.12	UP12/E	12/24	36	20/32	10/16	2.5	16.081.20 OPTIONAL	4.8
16.081.14	UP14/E	12/24	46	17/33	8.5/17	2.5	16.081.20 INCLUDED	5.5
16.081.16	UP14/E	24	46	-	8/13	3.5	16.081.20 INCLUDED	5.9

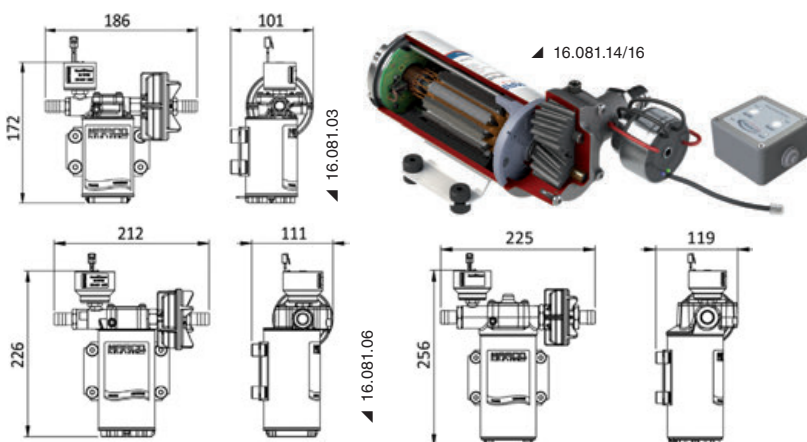

MARCO

MARCO electronically-operated double fresh water pump

Double version with two electronically-operated pumps working in parallel.

If one of the pumps breaks down, water delivery isn't cut off because the other pump is still operating.

Motor speed adapting to the flow. Reduced current draw and noise levels.

No accumulator tank.

Fitted with overvoltage protection device and a locking system against dry running.

The pump operation can be monitored by means of 2 LED lights.



Code	Type	V	Max flow rate/l/min	Current draw A		Pressure bar	←→ mm	2 control panels	kg
				12V	24V				
16.047.35	UP6/E-DX	12/24	52	16	8	2.5	282x300x235	16.081.20 INCLUDED	14
16.047.37	UP14/E-DX	24	92	-	18	3.5	295x300x265	16.081.20 INCLUDED	18.5

