

Accumulator tanks



Universal accumulator tank for fresh water pumps

Made of ABS, it can be retrofitted to any fresh water pump on the market. It prevents the typical pulsations when the tap is opened at a minimum rate.

Code	Volumetric flow	Max pressure	Hose adaptor
16.125.00	1	6.07 BAR	1/2" female



OSCULATI



Accumulator tank

ABS.

Code	Volumetric flow	Max pressure	Fittings	Hose holder included
16.127.00	0.75	8.6 bar	1/2"	2 to 13 mm

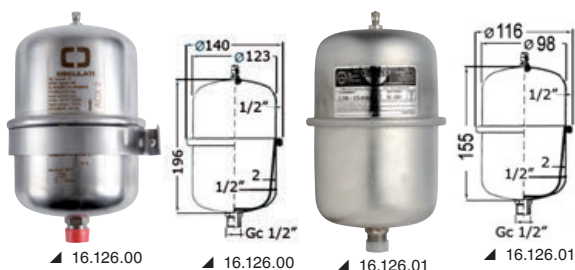

Universal accumulator tank for fresh water pumps and water heaters

It prevents the hammering effect when taps aren't opened at the maximum rate and when **hot water volume increases** in the water heaters. **Polished stainless steel body** and **butyl diaphragm**.

Code	Fitting	Volumetric flow	Operating pressure bar	Ø mm	Height mm	Hydraulic fittings to the pipeline OPTIONAL	Bracket
16.126.00	1/2"	2	1/10	130	196	17.318.02; 17.115.07	Yes
16.126.01	1/2"	1	1/10	116	155	17.318.02; 17.115.07	no

Europump submersible bilge pumps

Europump II submersible bilge pump

OSCULATI

Certificate **CE** from **RINA**, European Directive 2013/53/EU according to standard **ISO 8846**.

Code	Europump model	V	Flow l/min		Current draw A	Max head m	Base Ø mm	Height mm	Hose adaptor Ø mm
			maximum	with prevalence					
16.122.02	550	12	32	25	4	4.50	60	93	19
16.122.05	800	12	51	25	5.5	4.50	88	120	19
16.122.06	1000	12	64	30	5.5	4.50	88	120	29
16.122.07	1000	24	64	30	3.5	4.50	88	120	29
16.122.04	1100	12	60	32	5	4.50	60	107	29
16.122.10	1500	12	96	46	8	3.10	120	150	29
16.122.11	1500	24	96	46	5	3.10	120	150	29
16.122.14	2000	12	128	65	11	3.50	120	150	29
16.122.15	2000	24	128	65	6	3.50	120	150	29
16.122.18	3000	12	192	100	13	6.00	132	180	32
16.122.19	3000	24	192	100	8	6.00	132	180	32

