


Bilge and grey water pumps

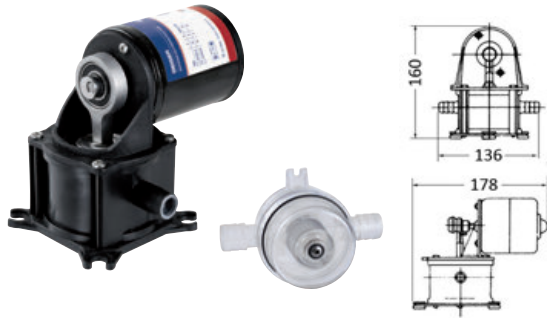

GEISER diaphragm self-priming bilge pump

Stainless steel plates, impact-resistant plastic and nylon parts, rubber-coated fabric parts resistant to any substances.

Watertight in compliance with ISO 8846 standards (it can be mounted in the engine room).
Supplied with strainer.

Code	Inlet / Outlet openings mm	V	A	Max flow rate / min	Head m	Replacement sealing membrane
16.292.12	3/4" (mm 19)	12	8	18	10	16.292.00
16.292.24	3/4" (mm 19)	24	4	18	10	16.292.00

OSCOLATI



SELF-PRIMING bilge pump

Self-priming pump with neoprene impellers. Watertight in compliance with ISO 8846 standards (it can be mounted in the engine room).

- Version A: Electrophoresis-coated engine case.

- Version B: **Model MKII** fitted with pump unit made of fiberglass-reinforced thermosetting resin + stainless steel internal inserts.

Code	Version	V	Max flow rate / min	Current draw A	Self-draining from m	OPTIONAL fittings	Replacement impeller
16.193.12	A	12	35	8	3	1/2" 19 mm	16.193.73
16.193.24	A	24	35	4	3	1/2" 19 mm	16.193.73
16.192.12	A	12	45	12	3	1/2" 19 mm	16.193.73
16.192.24	A	24	45	7	3	1/2" 19 mm	16.193.73
16.193.50	B	12	30	8	3	1/2" 19 mm	16.193.73



MARCO self-priming bilge pump

NEW INTEGRATED FLANGE

Rubber impeller, high-quality built, EMI internal noise suppressor.

Code	Initials	V	Max flow rate / min	Current draw A	Max pressure bar	Self-draining from m	Engine W	Hose adaptor	Replacement impeller
16.164.12	UP1-J	12	28	8	1	1.5	150	3/8"	-
16.165.12	UP1	12	35	11	1.2	1.5	180	1/2"	16.193.73
16.165.24	UP1	24	35	5.5	1.2	1.5	180	1/2"	16.193.73
16.166.12	UP1-M	12	45	14	1.2	1.5	360	1/2"	16.193.73
16.166.24	UP1-M	24	45	7	1.2	1.5	360	1/2"	16.193.73

Whale



WHALE Gulper 220 shower/black water drain pump

Specially designed for pumping waste water, large single diaphragm, non-throttling valves, operation **quiet, no filter needed**; self-priming up to 3 m. Can run dry and pump air-water mixtures, easy to install in tight spaces, double outlet valve ensures continuous flow. 360° swivel connectors, low consumption.

Code		Flow rate l/min at head m		Max flow rate / min	Current draw A	Maximum withdrawal m	Maximum suction m	Carrying device mm
RETAIL	BULK	V	Suction m0	Suction m1				
16.155.30	16.155.20	12	13.4	12.6	14	2.4/4.5	3	19
-	16.155.40	24	13.4	12.6	14	1.2/2.2	3	19



16.155.98 Closure ring and screws Gulper 220-320

16.155.99 Whale Gulper maintenance kit.

