



Centrifugal electric blower

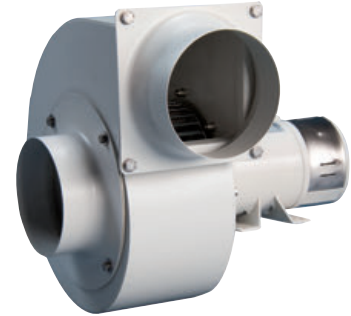

Stabilized steel blades. Fitted with **inlet/outlet** hose adaptor flange and inlet protection grid.

Code	V	Rotation	Power W	A max	RPM	Noise level dBA	Max capacity m³/min	Max pressure mm H ₂ O	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	L mm	P mm	Q mm	N mm	O mm	kg
16.102.07	24	LD	120	6	2000	56	15	30	130	155	90	115	75	98	8	340	270	110	98	225	80	102	6
16.102.08	24	RD	120	6	2000	56	15	30	130	155	90	115	75	98	8	340	270	110	98	225	80	102	6
16.102.11	24	LD	300	16	2800	65	24	64	160	160	110	110	78	118	8	320	322	135	118	273	90	110	10
16.102.12	24	RD	300	16	2800	65	24	64	160	160	110	110	78	118	8	320	322	135	118	273	90	110	10
16.102.15	24	LD	550	28	2000	70	37	64	215	215	160	160	250	160	2 (n°8)	390	410	192	200	340	90	110	19
16.102.16	24	RD	550	28	2000	70	37	64	215	215	160	160	250	160	2 (n°8)	390	410	192	200	340	90	110	19

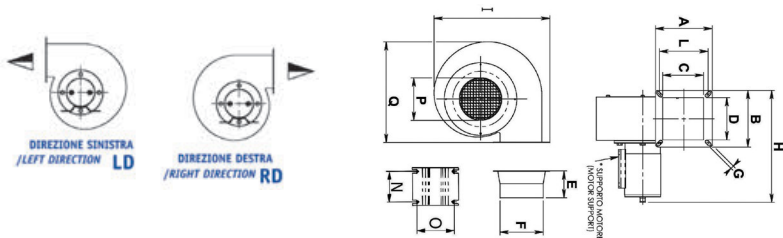

Helicoidal electric blower with stabilized polypropylene impeller




Type-tested in compliance with RINA standards on marine materials and equipment.

Nylon/glass impeller with operating temperatures -40 °C +100 °C.

Supplied as standard with single or double rotating side protection net (on both sides for maximum safety).

Code	V	Flow	Protection net	Power W	A max	RPM	Noise level dBA	Max capacity m³/min	Max pressure Pa	A mm	B mm	C mm	D mm	E mm	F mm	kg
16.103.03	24	A	Single	300	11	2500	65	30	225	250	260	285	310	200	330	8
16.103.04	24	P	Single	300	11	2500	65	30	225	250	260	285	310	200	330	8
16.103.11	24	A	Single	150	6	1400	62	56	160	350	360	400	425	215	330	11
16.103.12	24	P	Single	150	6	1400	62	56	160	350	360	400	425	215	330	11
16.103.07	24	A+P	Double	370	14	2000	68	60	240	305	315	348	378	200	330	10

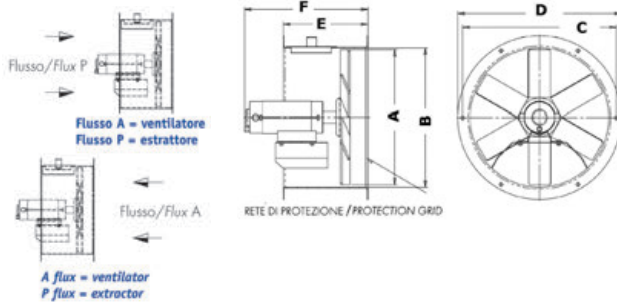

Hose connectors and water hook-ups

New Edge quick-coupling washdown hose connector

It connects the onboard fresh water system or to the washdown salt water pump and it keeps the line under pressure. The washing hose plugs in onto the inlet and automatically activates the pump. UV resistant **ASA** box, **chromed brass** device.

white	chromed	SS	mm	
			Ø Recess	Internal protrusion
16.441.18	16.441.38	16.441.88	69	50

17.224.01 OPTIONAL 1/2" male elbow fitting to plug into rear inlet hose

36.189.01; 36.189.03; 36.189.04 OPTIONAL Front male plug-in fitting

OSCULATI

