




Heavy Duty Classic Evo recess-fit fresh water inlet

QUICK SWIVEL CONNECTION

PRESSURE REDUCING VALVE

Ideal when you want to use quayside fresh water: it reduces the pressure to 3 bars not to damage the pipes by means of an innovative compact system fitted with adjustable pressure regulator and brass check valve. The quayside water pipe snaps into a gardening-like hose connector (see code 36.189.02). BSP male 3/4" outlet thread.
The dock water pipe snaps into place via a gardening-type fitting (code 36.189.02). 3/4" BSP outlet thread.

white	chromed	SS	↔ mm	
			Ø Recess	Internal protrusion
16.445.53	16.445.73	16.445.83	69	110-110

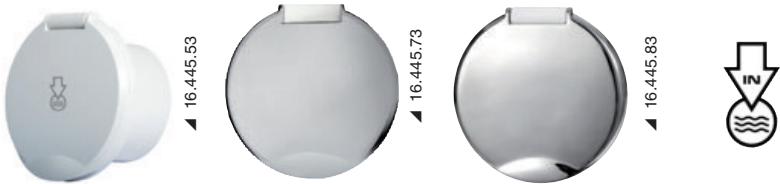

Elissa hose connector for fresh water


AISI 316

QUICK SWIVEL CONNECTION

PRESSURE REDUCING VALVE

Ideal when you want to use quayside fresh water: it reduces the pressure to 3 bars not to damage the pipes by means of an innovative compact system fitted with adjustable pressure regulator and brass check valve. The quayside water pipe snaps into a gardening-like hose connector (see code 36.189.02). BSP male 3/4" outlet thread.
The dock water pipe snaps into place via a gardening-type fitting (code 36.189.02). 3/4" BSP outlet thread. Compartment in AISI 316 stainless steel and self-supporting door.

Code	↔ mm	
	Recess hole	Internal projection
16.443.20	90x70	110-110

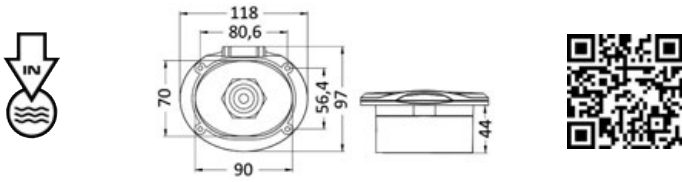

Nuvola fresh water inlet

STAINLESS LOOK

When using dock water, this inlet reduces pressure to 3 bars to prevent damage to the piping system. The **snap-in** hose connector has a **gardening-type coupling** (see code 36.189.02). 3/4" male outlet thread. UV-resistant **ASA** box with AISI 316 stainless steel insert.

Code	↔ mm	
	Recess hole	Internal projection
16.444.10	90x70	93/147

