

Brass compression joints for copper pipe with Biconical Brass seal

90° male	straigh female	straight male
17.409.01	17.412.01	17.408.01
17.409.02	17.412.02	17.408.02
17.409.04	17.412.04	17.408.04
17.409.05	17.412.05	17.408.05



Brass compression joints for cooper pipe with "O" Ring seal

Compression type on all connections.

T-shape	at 90°	for pipe Ø mm
17.410.02	17.410.20	10




Plastic fittings, skin fittings and valves

Skin fitting with polypropylene hose adaptor

Made of **white plastic**, fitted with **hose adaptor** (in compliance with CE standards only for usage above the waterline)

Code	A mm	B mm (hose holder)	C mm	D mm	Thread
17.322.01	22	15	75	43	1/2"
17.322.02	26	19	83	51	3/4"
17.322.03	32	25	94	62	1"
17.322.04	48	38	104	78	1" 1/2
17.322.05	41	30	94	67	1" 1/4
17.322.06	56	51	116	74	2"




OSCULATI




White plastic threaded skin fittings

Fully threaded

Code	A mm	C mm	D mm	Thread	ORDER BY BOX
17.394.01	21	70	43	1/2"	10
17.394.02	26	80	51	3/4"	10
17.394.03	33	90	62	1"	10
17.394.04	48	110	78	1" 1/2	10
17.394.05	41	100	67	1" 1/4	10



OSCULATI

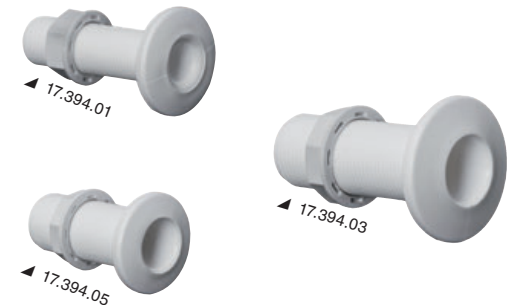

90° elbow skin fitting

made of white plastic, fitted with 90° hose adapter, complies with EC standards only for usage above waterline

Code	Type	Thread Ø mm	Length mm	Hose connection mm
17.395.01	1"	33	36	19
17.395.00	1"	33	36	25
17.395.20	1" 1/2	47	40	38



OSCULATI


90° elbow skin fitting

Made of nylon, equipped with fastening ring.

Code	Type	A* mm	A** mm	B mm	C mm	D mm
17.396.02	3/4"	26	27/30	20	84	50
17.396.03	1"	32	33/35	25	93	60
17.396.04	1" 1/2	48	50/51	38	114	72

* Ø threaded part.

** Ø hole to be drilled in the bulkhead. Depends on the thickness of the fiberglass.



OSCULATI

