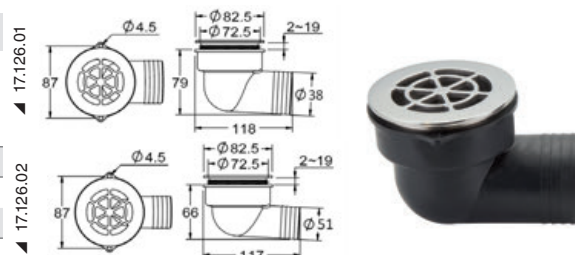


90° cockpit drain with check valve

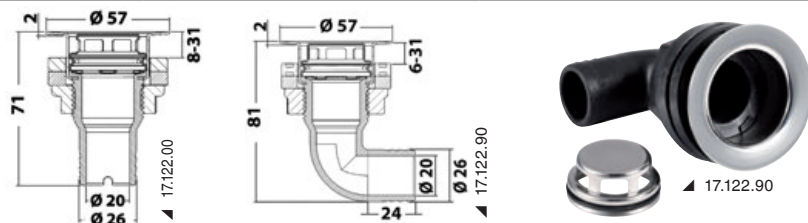
Body made of reinforced acetyl fibre. Head of AISI316 stainless steel and check flap.

Code	Head Ø mm	Hose adaptor mm
17.126.01	87	38
17.126.02	87	51

**Flush cockpit drain with stainless steel head**

Body made of reinforced acetyl fibre. Head of AISI316 stainless steel and removable filter.

Code	Version	Tube Ø mm
17.122.00	straight	26
17.122.90	90°	26

**Faired scupper vent**

Made of chromed brass. Fully threaded.

Code	Thread	Threaded neck length mm	↔ mm
17.333.01	1/2"	65	38x38x18
17.333.02	3/4"	65	44x44x20
17.333.03	1"	75	50x50x23
17.333.04	1" 1/4	79	57x57x27
17.333.05	1" 1/2	83	65x65x31
17.333.06	2"	90	80x80x44

**Stainless steel faired scupper vent**

AISI 316

Made of precision-cast mirror-polished AISI 316 stainless steel. Fully threaded.

Code	Thread	Threaded neck length mm	↔ mm
17.119.01	1/2"	65	38x38x18
17.119.02	3/4"	65	44x44x20
17.119.03	1"	75	50x50x23
17.119.04	1" 1/4	79	57x57x27
17.119.05	1" 1/2	83	65x65x31
17.119.06	2"	90	80x80x44

**Plastic scuppers and cockpit drains****Flush head cockpit drain fitted with strainer net**

Made of white nylon.

Code	Size	Thread Ø mm	Hose adaptor mm	Length mm
17.395.50	1" 1/2	47	32/38	117


OSCULATI

**Shower/cockpit nylon drainers**

Made of white nylon, fitted with filter and 100° elbow

Code	Ø flange (A) mm	Ø hole to be drilled (C) mm	Ø Hose holder (D) mm	Maximum protrusion (E) mm
17.399.90	45	25	19	60
17.632.20	70	50	29	80
17.411.80	68	50	38	90

OSCULATI

**Skin fitting**

Fitted with **check valve** made of **white nylon**, large passage flow..

Code	Accept thickness	Clear passage	Mounting	Required hole
17.320.50	from mm 30 up to 139	Ø 50 mm equal to 1960 mm²	pressure	Ø mm 66

**Universal adapter for piping**

Made of **plastic**, it connects 1" 1/2, 1" and 3/4" piping. 20/25/38-mm hose connector. It can be modified by previously cutting the SLEEVE adapter to connect 1" 1/2 fittings.

Code	Description
17.238.50	adapter
17.238.51	sleeve

