


3-way WHALE "Henderson" valve

Capable of opening two separate bilges with just one pump (series MKV), even if one of the bilges is dry. It is also suitable for loading water into two separate tanks with just one intake; can be mounted onto the wall or behind the bulkhead.

Code	Hose adaptor Ø mm
17.713.00	38
17.713.01	25



Flush mount filter for bilge pumps and showers

Prevents clogging from hair debris; fitted with clear plastic case for easy inspection; specially suitable for link rod pumps models Par, Fiamma, Flojet, Shurflo ecc.

Code	Hose adaptor
17.179.12	5/8" (15,8 mm)
17.179.13	3/4" (19 mm)



Nylon cylindrical water hose joints

To get different diameter sizes, see combinations.

Code	Ø mm	Compatible fittings*	Code	Ø mm	Compatible fittings*
17.205.12	12	A	17.205.22	22	C
17.205.14	14	A	17.205.25	25	C
17.205.16	16	A	17.205.30	30	D
17.205.18	18	B	17.205.35	35	E
17.205.20	20	B			

* Ex. of pairing A: 17.205.12; 17.205.14; 17.205.16




"T" nylon joints for water hoses

Code	Ø mm	Code	Ø mm
17.204.10	10	17.204.18	18
17.204.12	12	17.204.20	20
17.204.14	14	17.204.22	22
17.204.16	16	17.204.25	25




"Y" nylon joints for water hoses

Code	Ø mm
17.203.08	8
17.203.10	10
17.203.12	12
17.203.14	14
17.203.16	16

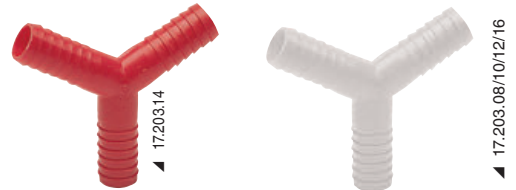


Nylon thru-hull fitting

Code	Hose adaptor Ø mm	Colour
17.237.10	19/20	☐ white

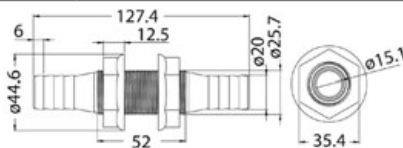

High strength thermopolymer bulkhead

Code	A mm	B mm	H mm	Thread	Hose holder D mm
17.237.01	45	77	22	1/2"	11/13
17.237.02	49	84	22	1/2"	15/17
17.237.03	69	107	23	3/4"	20/22
17.237.04	69	107	23	1"	26/29

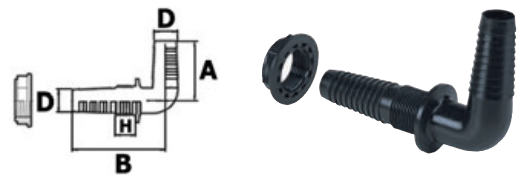

Universal adapter with hose adapter

Code	Ø mm
17.175.38	13/16/19/22/25/28.5/32/38
17.175.60	31/39/45/50/58



T joints made of high strength thermopolymer

Recommended to drain 2 outlets with a sole skin fitting.

Code	Thread F1	Thread F
17.237.50	1/2"	1/2"
17.237.51	3/4"	1/2"
17.237.52	3/4"	3/4"
17.237.53	1"	1"

