

Clamp supports

Fitted with central mounting system with one **nylon screw**, **type approved RINA 5/043/93**.

Code	Maximum width of clamps mm	↔ mm	 ORDER BY BOX
18.034.05	5	9.5x15x7h	100
18.034.09	9	15x22x11h	100




Cable ties

Made of **nylon 6/6**, suitable for cabling, self-locking system with teeth.

 white	 Black	Type	Length A mm	Width B mm	Beam diameter mm	Maximum holding capacity kg	 ORDER BY BOX
18.031.00	18.051.00	A	98	2.5	1/21	8	100
18.031.01	18.051.01	A	140	3.5	2/35	13	100
18.031.11	18.051.11	A	200	3.5	2/50	13	100
18.031.02	18.051.02	A	178	4.8	2/45	22	100
18.031.03	18.051.03	B	290	4.5	2/79	22	100
18.031.33	18.051.33	B	390	4.8	3/106	22	100
18.031.04	18.051.04	B	365	7.5	5/100	55	100
18.031.44	18.051.44	A	540	7.5	35/158	55	100
-	18.031.06*	-	285	8.8	3/70	80	100
-	18.031.07*	-	375	8.8	5/100	80	100
18.031.19	18.051.19	B	225	12.5	7/57	110	50
18.031.20	18.051.20	B	500	12.5	30/143	110	50
18.031.21	18.051.21	B	720	12.5	30/200	110	50

*For heavy loads, rounded edges, flat double head.

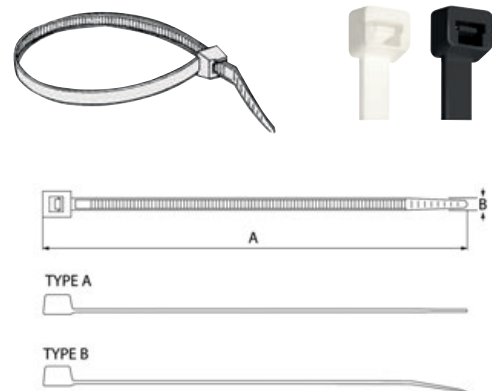

Colored nylon strap

Ideal to spot cables and circuits

 red	 yellow	 green	 blue	Length mm	Width mm	Ø max beam mm	Maximum holding capacity kg	 ORDER BY BOX
18.049.02	18.049.12	18.049.22	18.049.32	140	3.5	32	18.3	100
18.049.03	18.049.13	18.049.23	18.049.33	200	3.5	50	18.3	100
18.049.04	18.049.14	18.049.24	18.049.34	200	4.8	50	22.4	100
18.049.05	18.049.15	18.049.25	18.049.35	290	4.5	78	22.4	100



2-Lock ® clamp with AISI316 stainless steel closure

Fitted with a new stainless steel cage closure built in the clamp head for:

- Double tensile strength in comparison with standard clamps.
- Smooth knurling-free tape, easier to apply and requiring less effort.
- Length continuous adjustment for correct tensioning on any diameter.


Code	Colour	Width mm	Length mm	Beam diameter mm	Maximum holding capacity kg	 ORDER BY BOX
18.042.00	 white	2.5	100	1/21	18.3	100



Flat head Belturing Plus technopolymer tie with high strength

Outer rack, high grip, possible use in temporary position, UV-resistant.

Code	Head	Length mm	Width mm	Ø max beam mm	Maximum holding capacity kg	 ORDER BY BOX
18.053.01	Single	115	6	25	28	100
18.053.02	Single	180	6	45	28	100
18.053.03	Single	290	6	78	28	100
18.053.04	Single	360	6	100	28	100
18.053.08	double	260	9	60	55	100
18.053.10	double	360	9	93	55	100

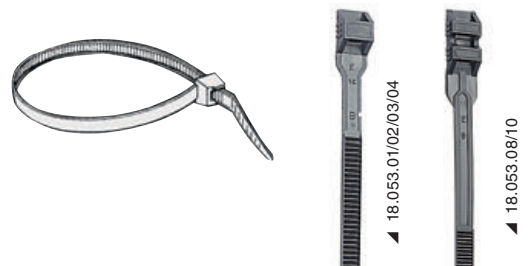

Nylon strap

For wiring, self-locking system, fitted **with eyelets** for screws. Ideal to bundle cables and fasten them with a screw or rivet on any support.

Code	Width mm	Length mm	Minimum clamping diameter Ø mm	Eye Ø mm	Maximum holding capacity kg	 ORDER BY BOX
18.037.01	4.8	200	3.5	5.2	22	100
18.037.02	7.8	200	4	6.5	55	100
18.037.03	7.8	300	4	6.5	55	100



Nylon strap with plate

Suitable for cabling, includes over-writable pad with felt-tip pen suitable for the identification of cables or pipes.

Code	Width mm	Ø clamping mm		Length mm	Maximum holding capacity kg	 ORDER BY BOX
		minimum	Maximum			
18.038.01	2.5	1	20	110	8.1	100
18.038.02	2.5	1	52	210	8.1	100

