

LEWMAR®



LEWMAR Ocean hatch




It is classic and extremely robust, for many years the first choice for thousands of boats worldwide.
CE approved for AREA 2. Model with flat base.

Code	Model	outside mm						cutting dimensions (vary if a counterflange is used) mm			kg	Acrylic thickness mm	Finish counterflange + mosquito net
		X	Y	Z	R	HY	HX	X1	Y1	R1			
19.420.10	10	324	324	39.5	75	138	5	255	255	40	2.26	10	-
19.420.20	20	266	411	39.5	69	225	5	197	342	34	2.74	10	19.413.21
19.420.30	30	391	521	39.5	75	335	5	322	452	40	4.5	10	19.413.30
19.420.40	40	485	485	39.5	75	299	5	416	416	40	4.76	10	19.413.40
19.420.60	60	574	574	43	76	367	4	502	502	40	10.8	12	19.413.60
19.420.70	70	694	694	43	76	487	4	622	622	40	13.2	12	19.413.70



19.903.08 Seal bracket for hatch door equipped with supports

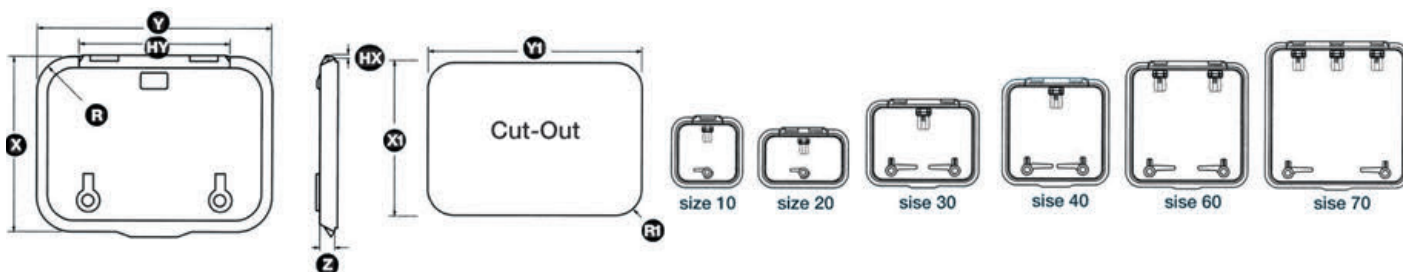

LEWMAR Flush Hatch

LEWMAR®



It requires a special recess to be installed into the deck to receive the hatch. Clean and simple look, no protruding parts, space-wise use of deck surface.

Technical data:

- **No visible frame:** the black acrylic panel is all that can be seen on deck.

- **Very thick self-supporting plexiglass lid.**


- 90° opening **stay**, self-locking in any position.

- Smoked lens available upon request.

- Exterior handle for use as **escape hatch**.

- CE-approved for 2A area.

Compatible with LEWMAR flyscreens, trimming rings and frames.

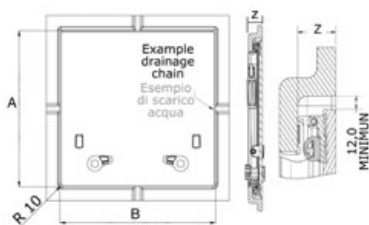

Code	Model	Recess thickness Z mm	external AxB mm	cut size mm	kg	Acrylic thickness mm	Finish counterflange + mosquito net
19.440.10	10	31	330x330	260x260	2.6	12	-
19.440.20	20	31	272x417	202x347	3.1	12	19.413.20
19.440.44	44	31	512x512	442x442	5.8	12	19.413.44
19.440.60	60	31	577x577	507x507	6.7	15	19.413.60
19.440.70	70	32-34	697x697	627x627	10.2	15	19.413.70




19.903.08 Seal bracket for hatch door equipped with supports

LEWMAR®

LEWMAR pilot hatch

Sliding hatch designed for use on the wheelhouse and ensuring ventilation and radiation. For flat mounting. The styling complements the Low Profile and Medium Profile Hatch Ranges.

The external appearance of the pilot hatches matches perfectly with the Low and Medium Profile models.



Code	Model	External dimensions X<->Y mm	Cutting dimensions x1 <->y1 mm	Length of T-rail in mm	Recessed flange protrusion mm
19.450.60	60	581-577	507-507	373	15
19.450.78	78	844-790	770-720	638	15

