

LEWMAR trimming ring and flyscreen

White colour (ivory color available on request).

Code	For hatches	Max deck thickness with series mm		Minimum deck thickness with series mm		For hatches art.
		Low pressure	Ocean	Low pressure	Ocean	
19.413.18	18	62	-	15	-	19.410.18
19.413.20	20 Low profile	62	-	15	-	19.410.20
19.413.21	20 Ocean	-	72	-	25	19.420.20
19.413.22	22	62	-	15	-	19.410.22
19.413.30	30	62	72	15	25	19.410.30; 19.411.30; 19.420.30
19.413.40	40	62	72	15	25	19.410.40; 19.420.40
19.413.44	44	62	-	15	-	19.410.44; 19.411.44; 19.440.44
19.413.54	54	62	-	15	-	19.410.54
19.413.60	60	62	72	15	25	19.410.60; 19.411.60; 19.420.60; 19.440.60
19.413.70	70	-	72	-	25	19.420.70

LEWMAR®



Porthole LEWMAR NEW Standard

LEWMAR®

EASY TO INSTALL

Portlight range with high quality finish and materials. Fitted with built-in friction levers to leave the portlight open in any position, quick and safe locking. Supplied with **white ABS trimming ring** (ivory colour available upon request), it includes **mounting screws and flyscreen**, smoked glass. Easy to install by a single person by fastening the trimming ring into the threaded bores. **CE-approved for AREA 2.**

CE


Code	Model	outside mm				cut size mm			kg	Acrylic thickness mm
		X	Y	Z	R	X1	Y1	R1		
19.430.00	0	176	323	4	62	156	303	52	1.1	8
19.430.10	1	191	367	4	62	171	347	52	1.3	8
19.430.18	1RE	191	367	4	95	171	347	85.5	1.3	8
19.430.20	2	176	425	4	62	156	405	52	1.4	8
19.430.30	3	191	449	4	62	171	429	52	1.7	10
19.430.40	4	191	646	4	62	171	637	52	2.4	8

Cerniere frizionate
non soggette a corrosione
Friction hinges
not subject to corrosion

Flange interna/esterna in alluminio
resistenti alla corrosione
Internal/external flanges
corrosion-resistant aluminum



CE approved

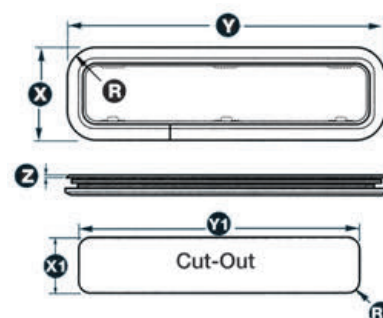

Maniglie rapide
non risentono delle vibrazioni
Rapid handles
are not affected by vibrations

Il design del profilo previene l'entrata
dell'acqua anche su superfici inclinate
The profile design prevents water
from entering even on sloping surfaces

LEWMAR flush porthlights

EASY TO INSTALL

A series of porthlights meeting the needs for design and modern look. Built-in friction hinges and snap levers for quick and safe locking. Matt black powder-coated anodized aluminium frame for mounting on fiberglass and plexiglass. Fast and simple installation to be made by a single operator. The external threaded frame matches the internal trimming ring by means of thru screws.

CE

Code	Model	outside mm				cut size mm			kg	Acrylic thickness mm	Certifications
		X	Y	Z	R	X1	Y1	R1			
19.430.04	0	175	322	4	5	156	303	5	1.3	12	CE Area 2
19.430.14	1	190	366	4	5	171	347	5	1.6	12	CE Area 2
19.430.34	3	190	448	4	5	171	429	5	2	12	CE Area 2
19.430.44	4	190	645	4	5	171	626	5	2.8	12	CE Area 2
19.430.64	6	200	490	4	5	181	471	5	2.2	-	CE Area 2



LEWMAR®

